



# Troubleshooting Gas Lift Wells Using Simultaneous Acoustic Surveys

Gustavo Fernandez (Echometer Company)  
Julio Haulcy (Conoco Phillips)

ALRDC Gas Lift Workshop  
June 7<sup>th</sup>-11<sup>th</sup> 2021



# Introduction

- ▶ The number of Gas Lift systems has increased significantly along with unconventional wells.
- ▶ The need of understanding the performance and troubleshooting Gas Lift systems is now even more relevant for operators.
- ▶ Tubing-casing communication is one of the biggest issues and it can be identified from surface using a simple, quick, safe and effective simultaneous acoustic survey to find holes in tubing or leaky gas lift valves above the liquid level.
- ▶ The Dual Shot Method is a non-invasive technique.
- ▶ Two guns with microphones are connected to the wellhead, one to the tubing and the other to the casing-tubing annulus.
- ▶ One of the guns is used to release a pressure wave down the well, while the other gun just listens for possible echoes from tubing-casing pressure communications.
- ▶ Both acoustic surveys (tubing and casing) are simultaneously recorded and overlaid for its proper evaluation.

# Wireless Fluid Level equipment configuration

Artificial Lift  
R&D Council



**TUBING Wireless  
Fluid Level Gun**




**TUBING Wireless  
Fluid Level Gun**



**CASING Wireless  
Fluid Level Gun**




**CASING Wireless  
Fluid Level Gun**

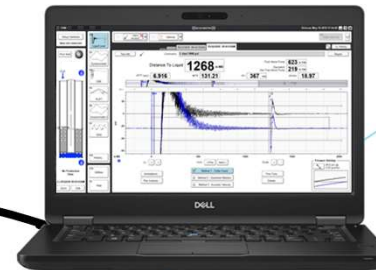



# Wireless Fluid Level shot recorded in Tubing & Casing

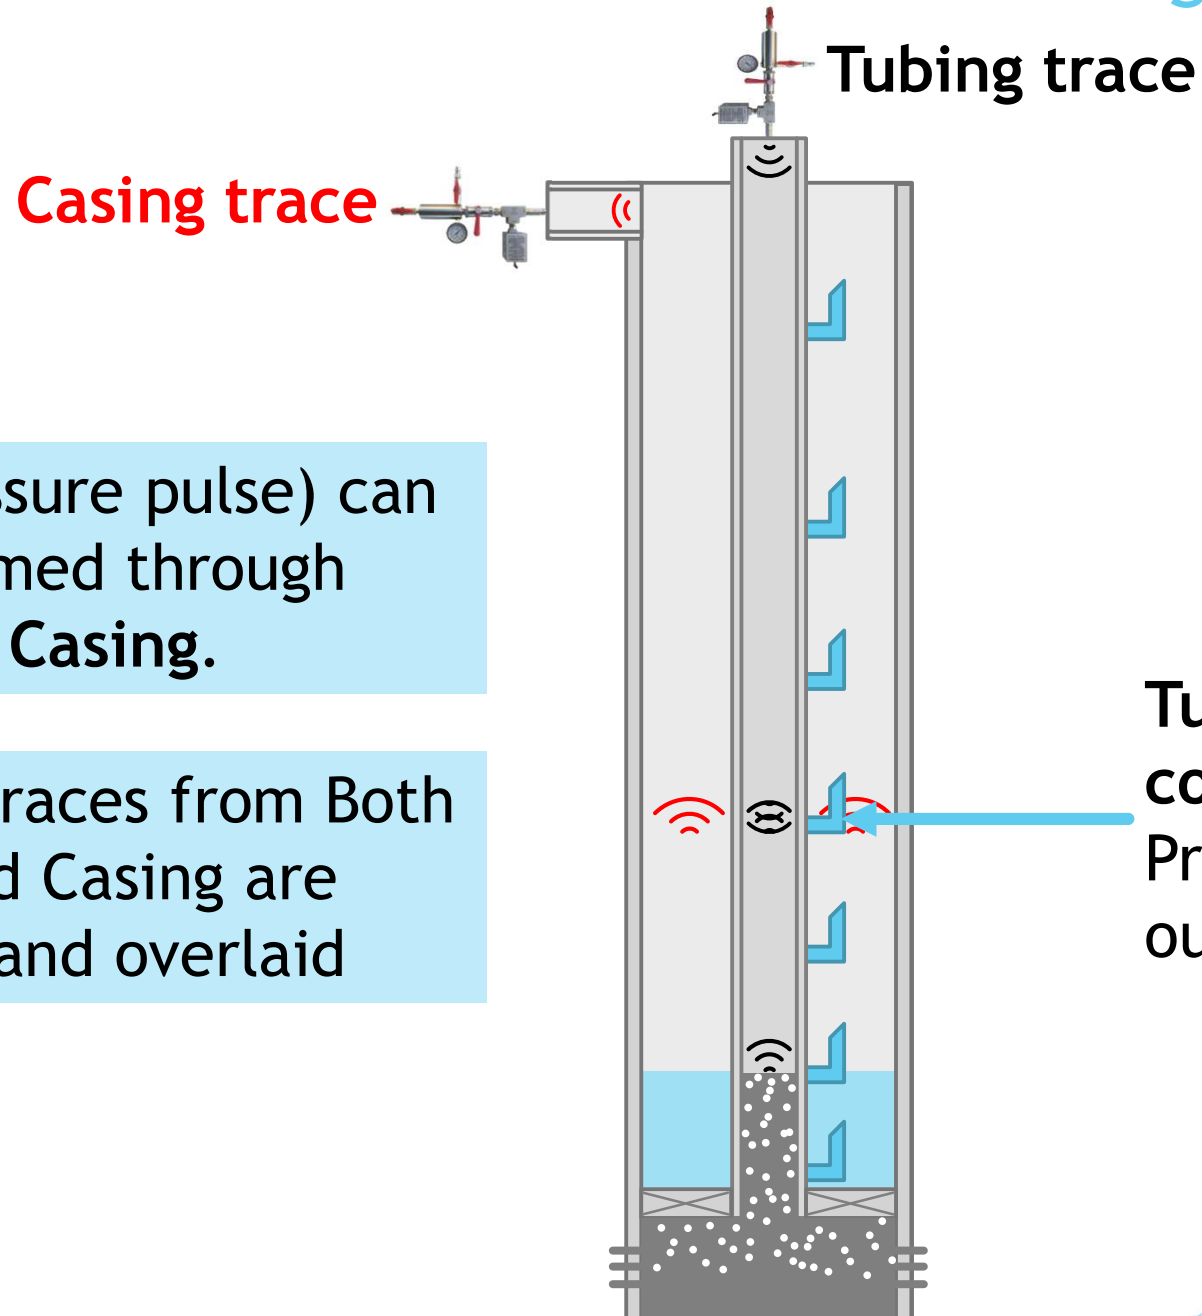


Shot (pressure pulse) can be performed through **Tubing** or **Casing**.

Acoustic traces from Both Tubing and Casing are recorded and overlaid

**Tubing-Casing communication point**  
Pressure wave coming out of tubing


# Acoustic traces from Both Tubing and Casing are recorded and overlaid using Plunger Lift Application.

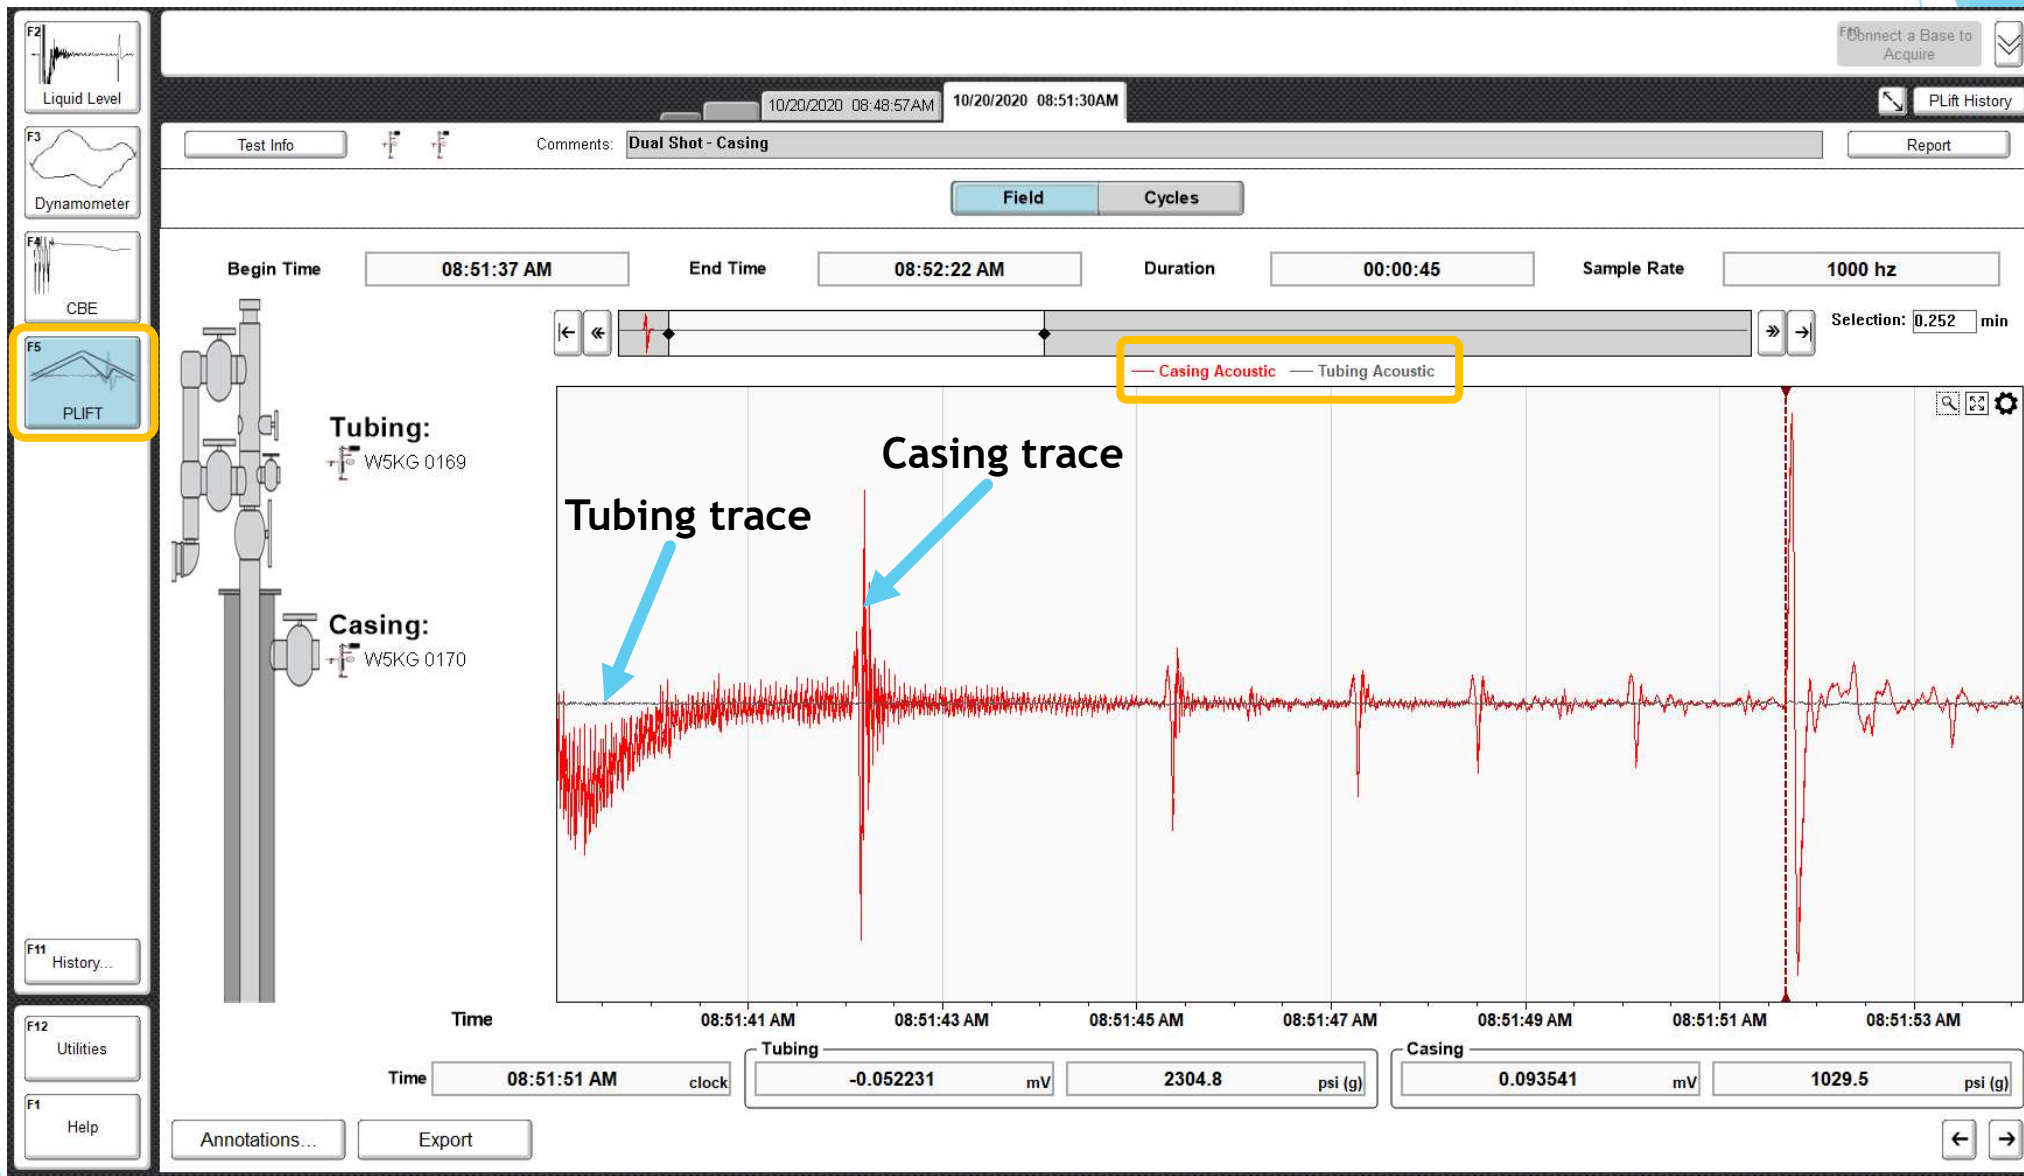

# Direction of kicks in fluid level single shots

Tubing vs. Casing from Mandrels and holes.

Artificial Lift  
R&D Council


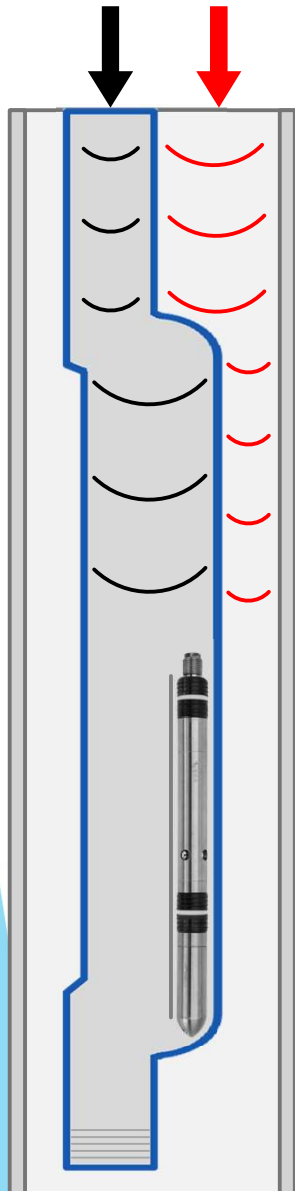


Increases in cross-sectional areas creates UP-kicks.

Decreases in cross-sectional areas creates DOWN-kicks.

## Direction of kicks

Anomaly \ Shot Path	Direction of kicks	
	Tubing Shot	Casing Shot
Gas Lift Mandrel	↑	↓
Hole in tubing	↑	↑

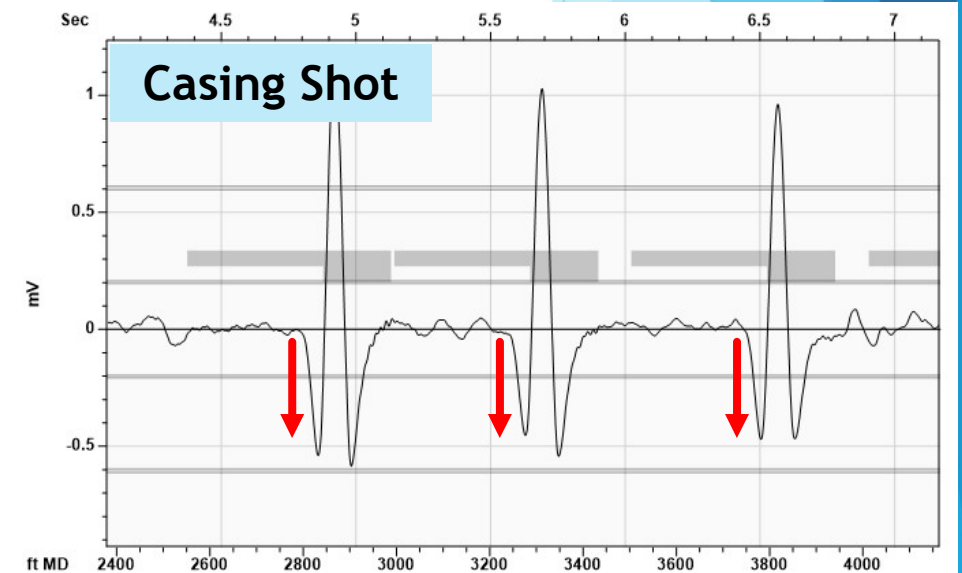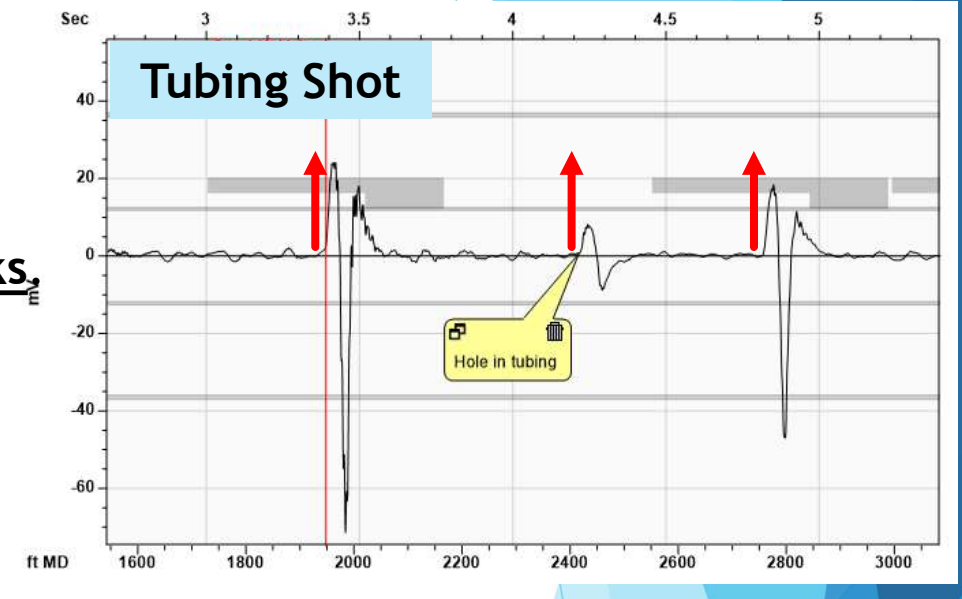



# Well Example 1


Wells presented have the following configuration:

- Gas Lift Wells
- Tubing packer installed
- Side pocket Mandrels (Tubing Retrievable Valves)

# Well Example 1



Initial single Tubing and Casing shots, prior simultaneous acoustic acquisition.

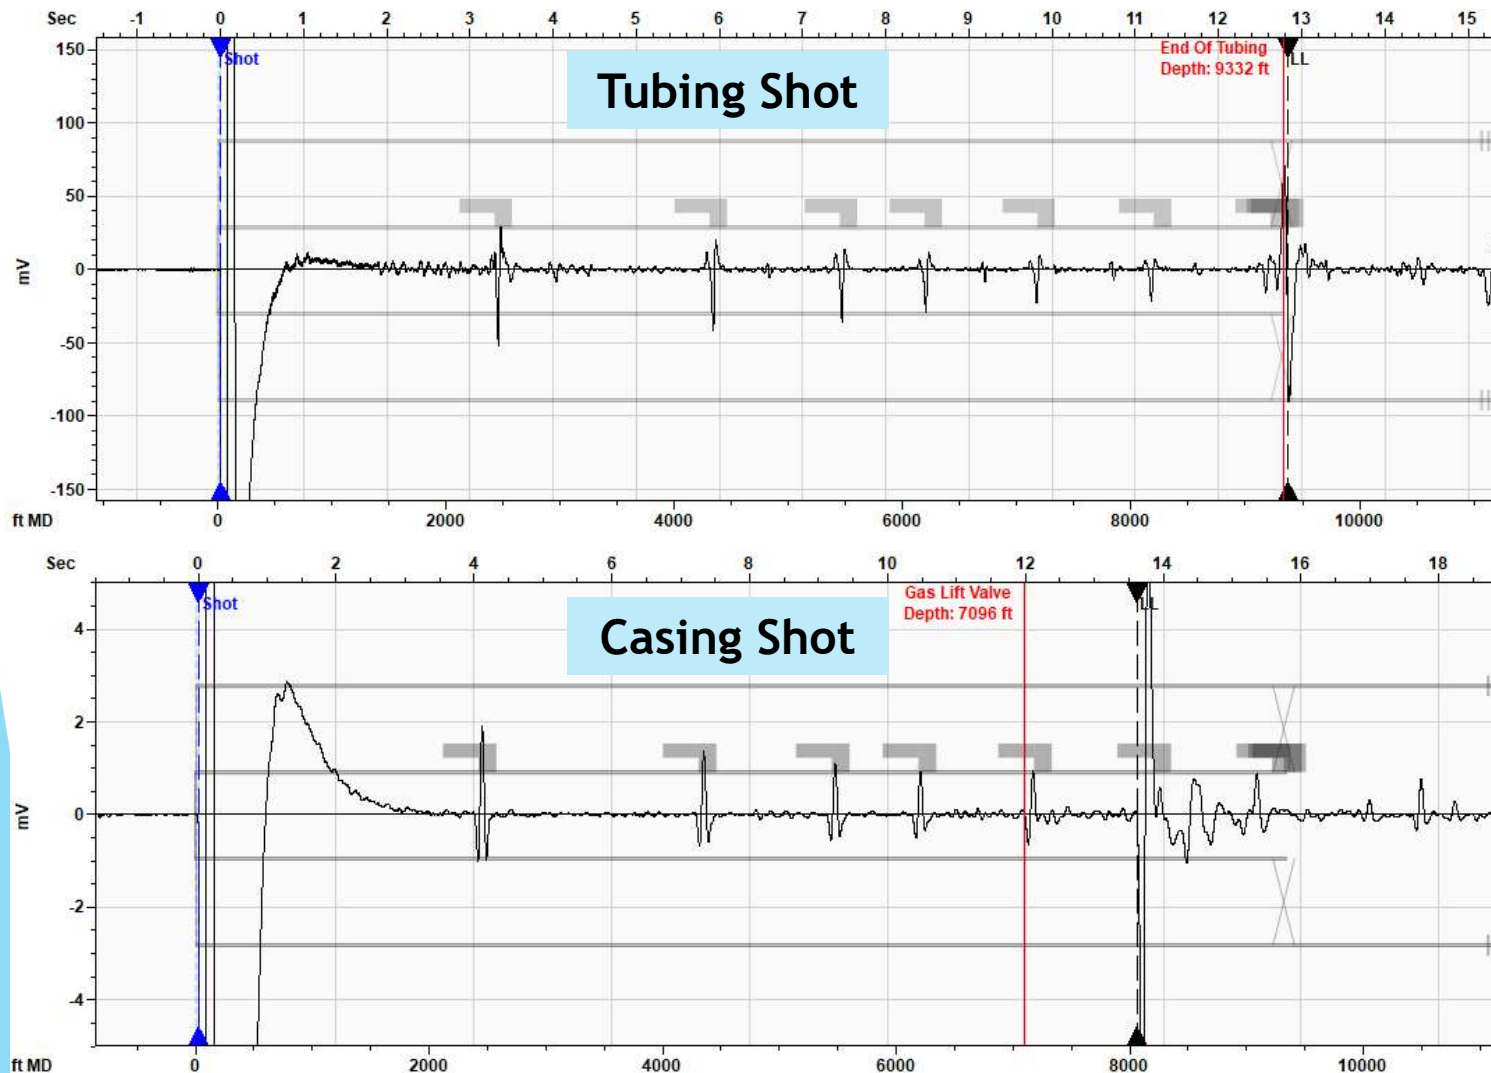


Side pocket Mandrels are visible from tubing and casing shots.


Gas Lift Mandrels can be used as downhole marker to accurately determine depth of anomalies and Fluid Level.



# Well Example 1

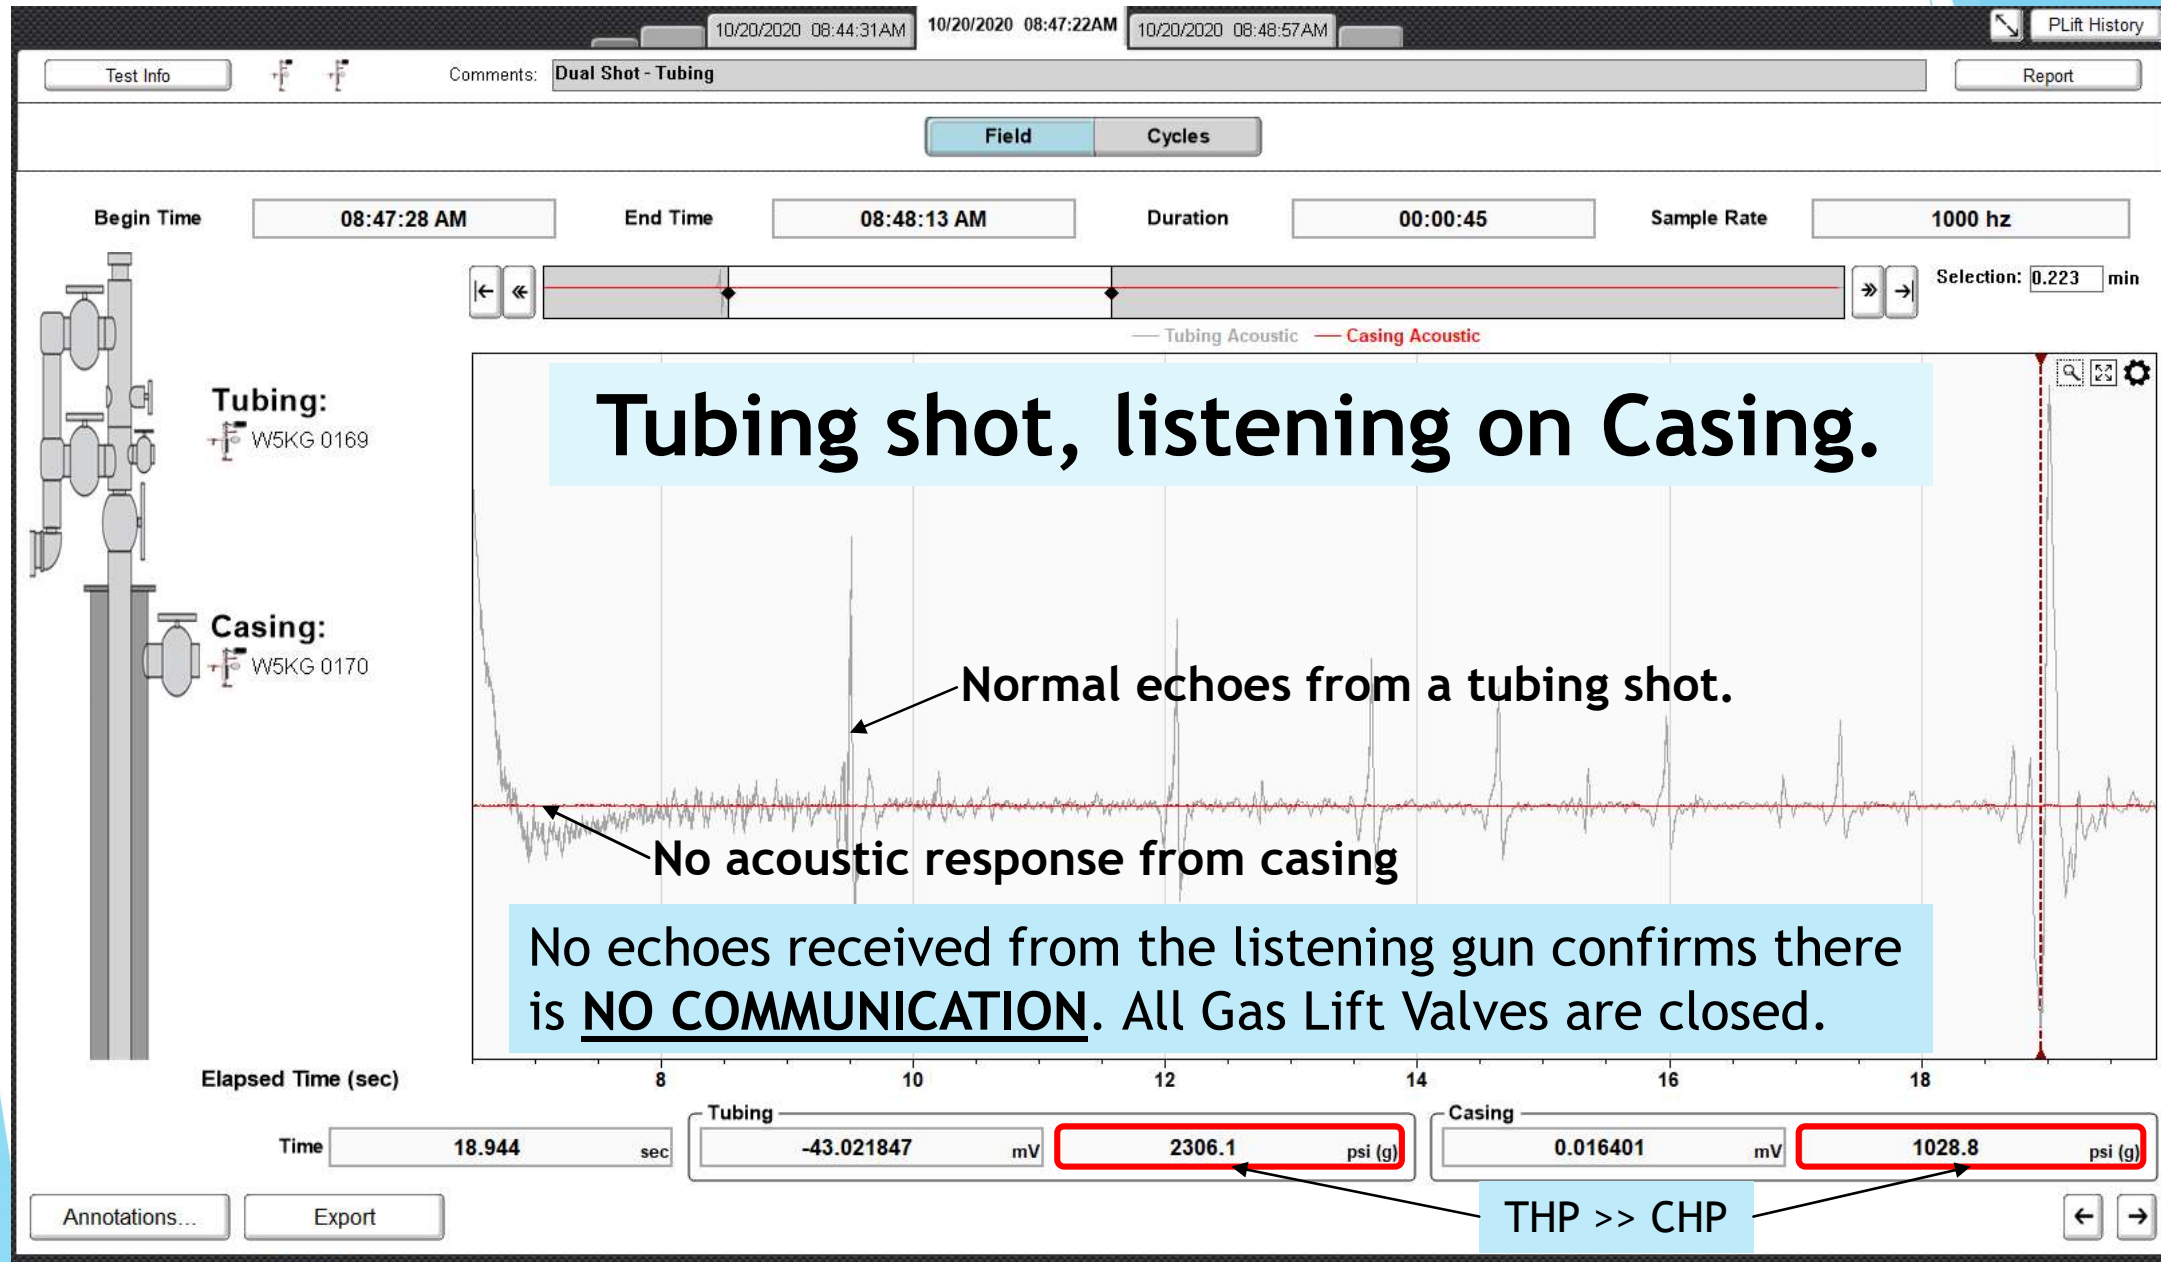

# Well Example 1

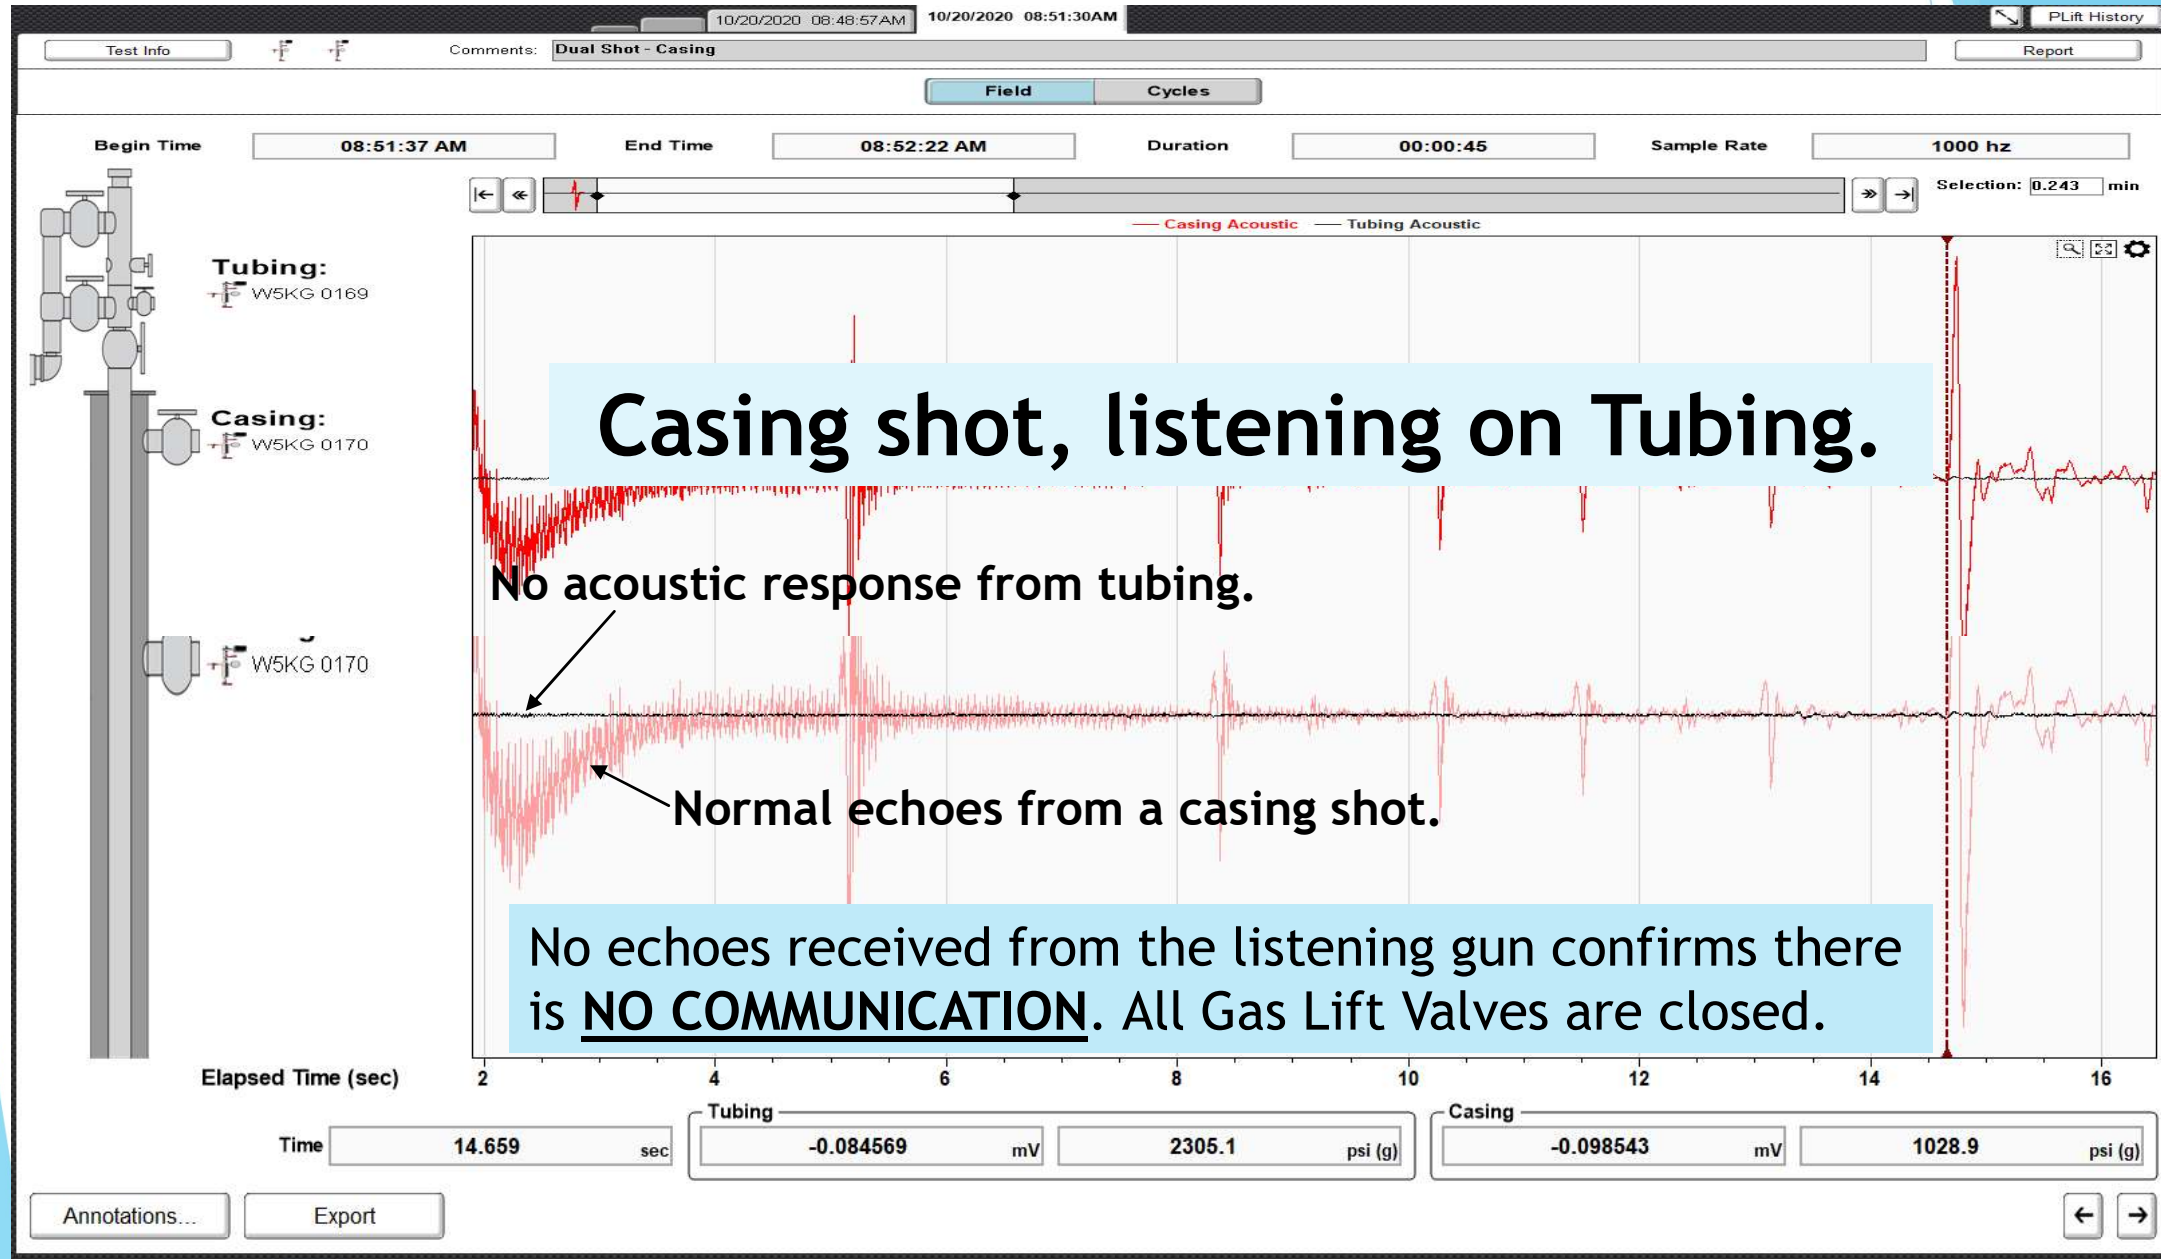

# Well Example 2


Artificial Lift  
R&D Council



# Well Example 2

Initial single Casing shot, prior simultaneous acoustic acquisition.

Artificial Lift  
R&D Council

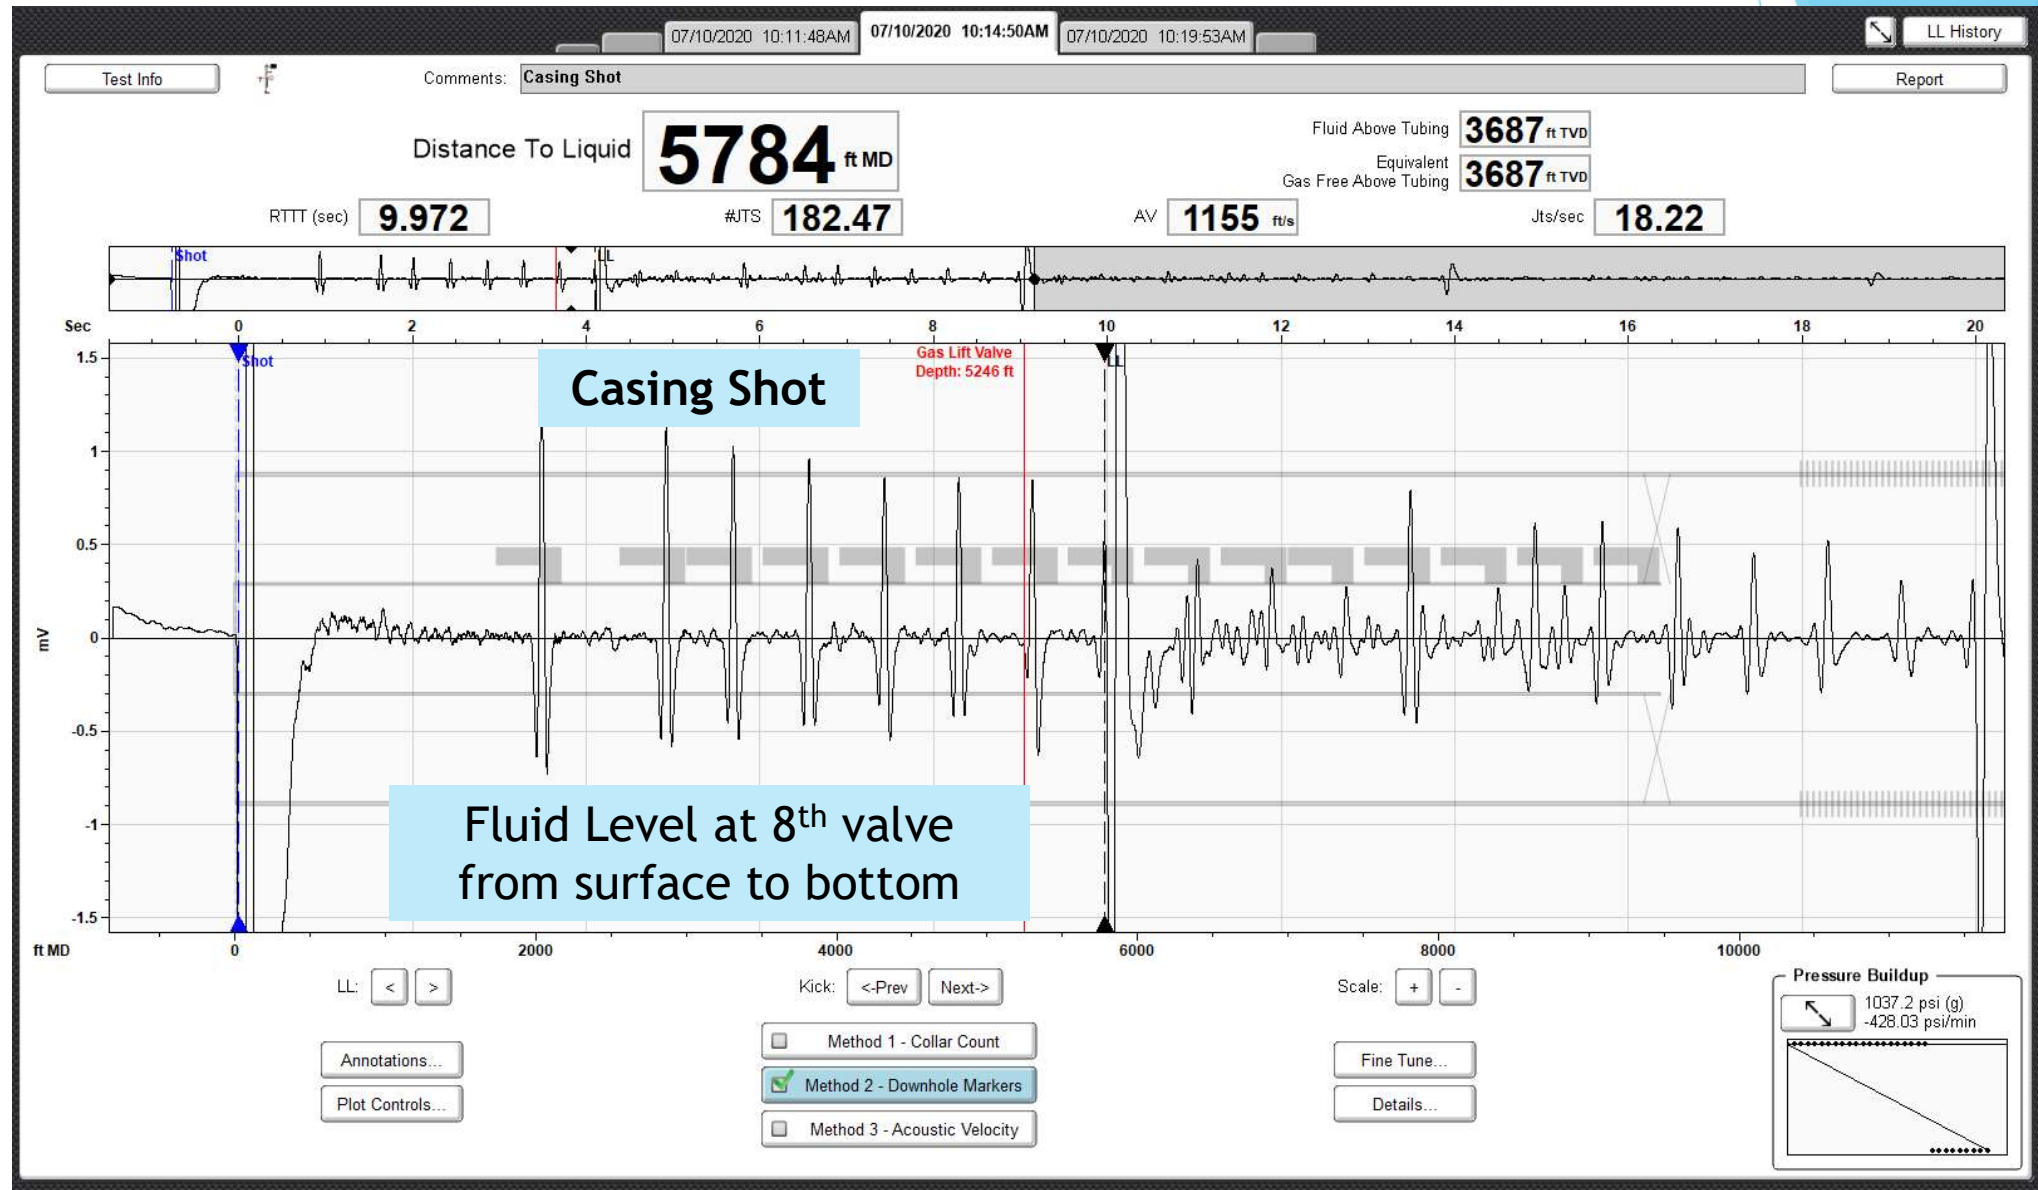





# Well Example 2

Initial single Tubing shot, prior simultaneous acoustic acquisition.


Artificial Lift  
R&D Council

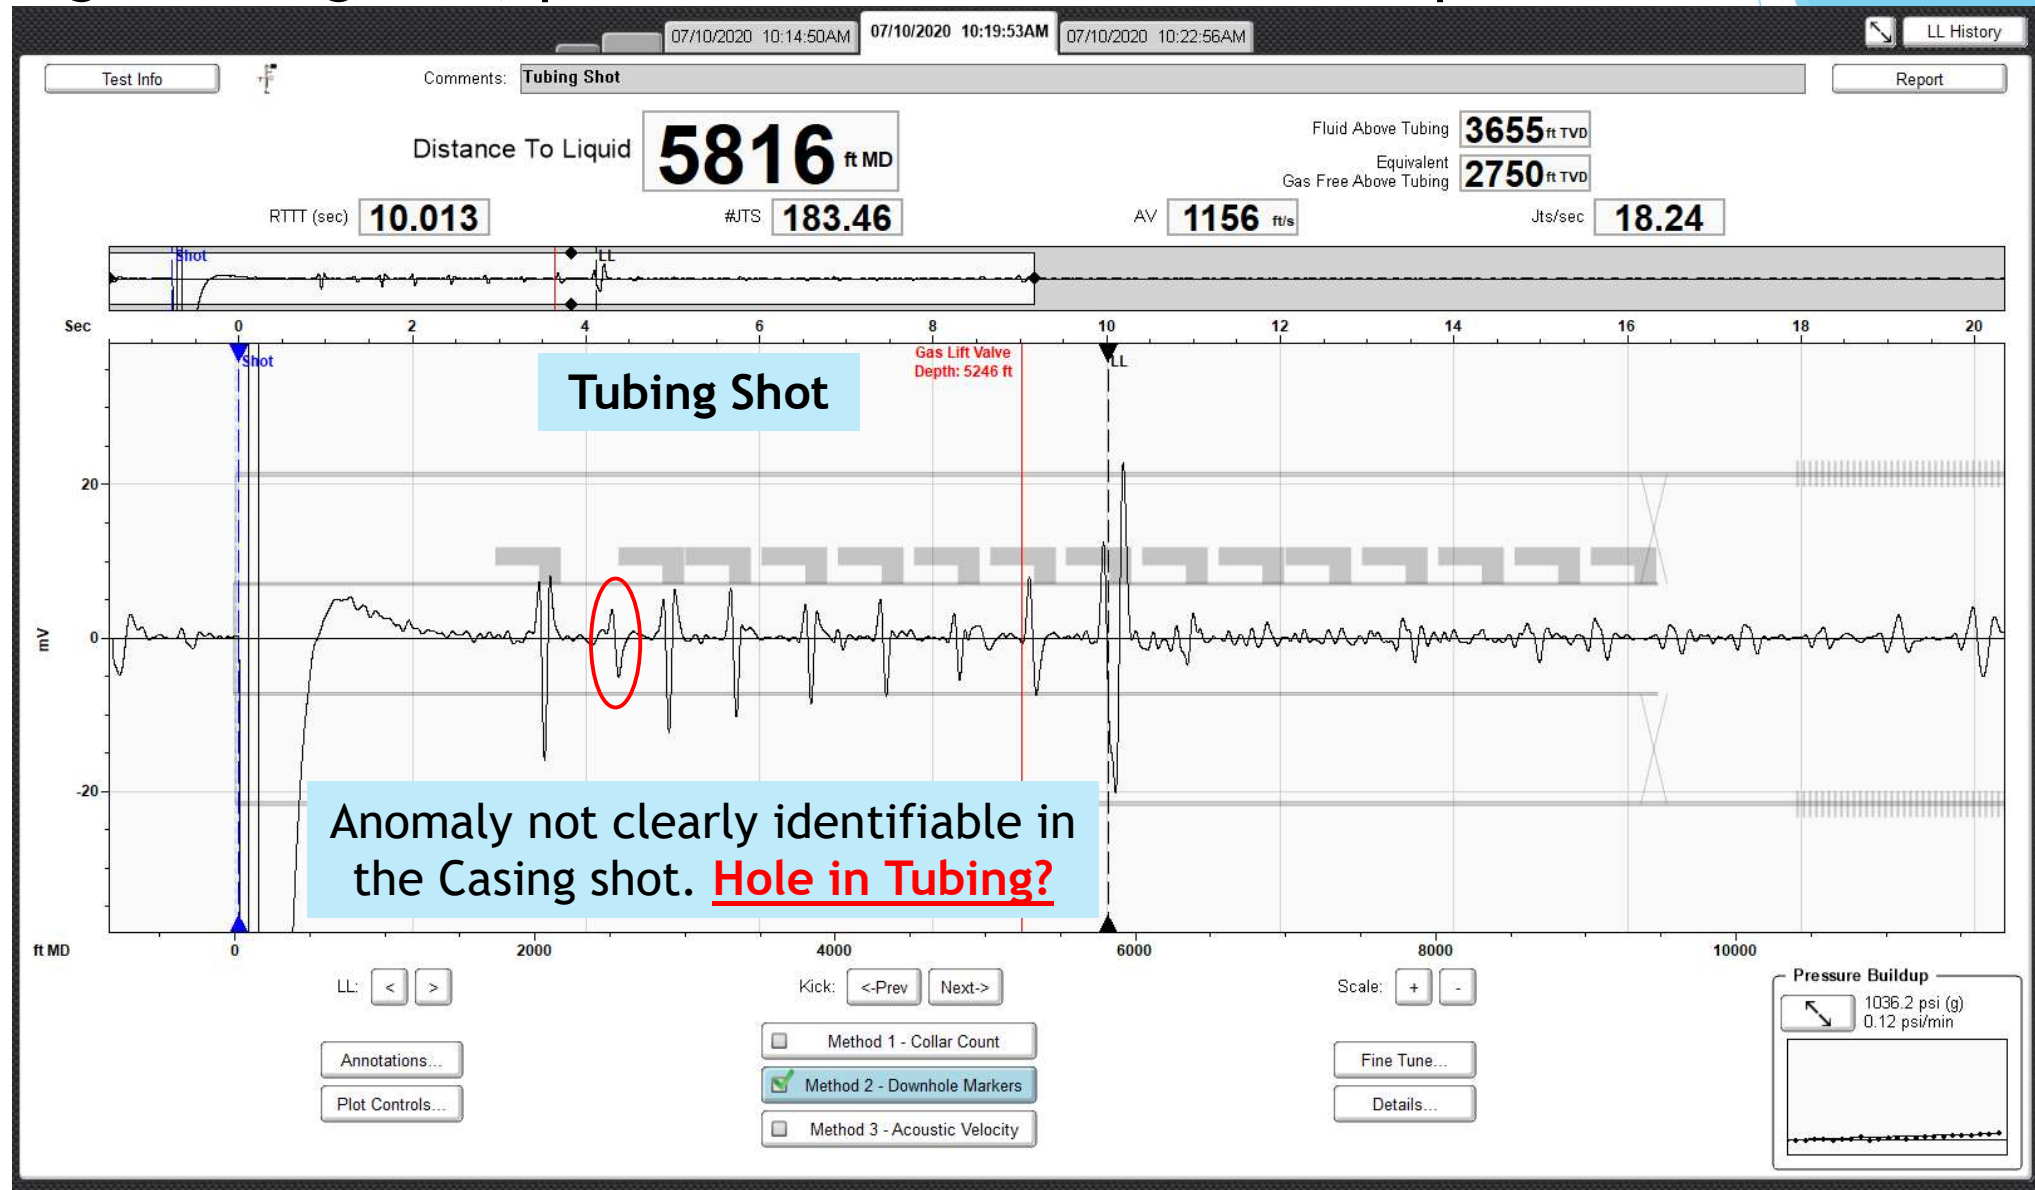

# Well Example 2

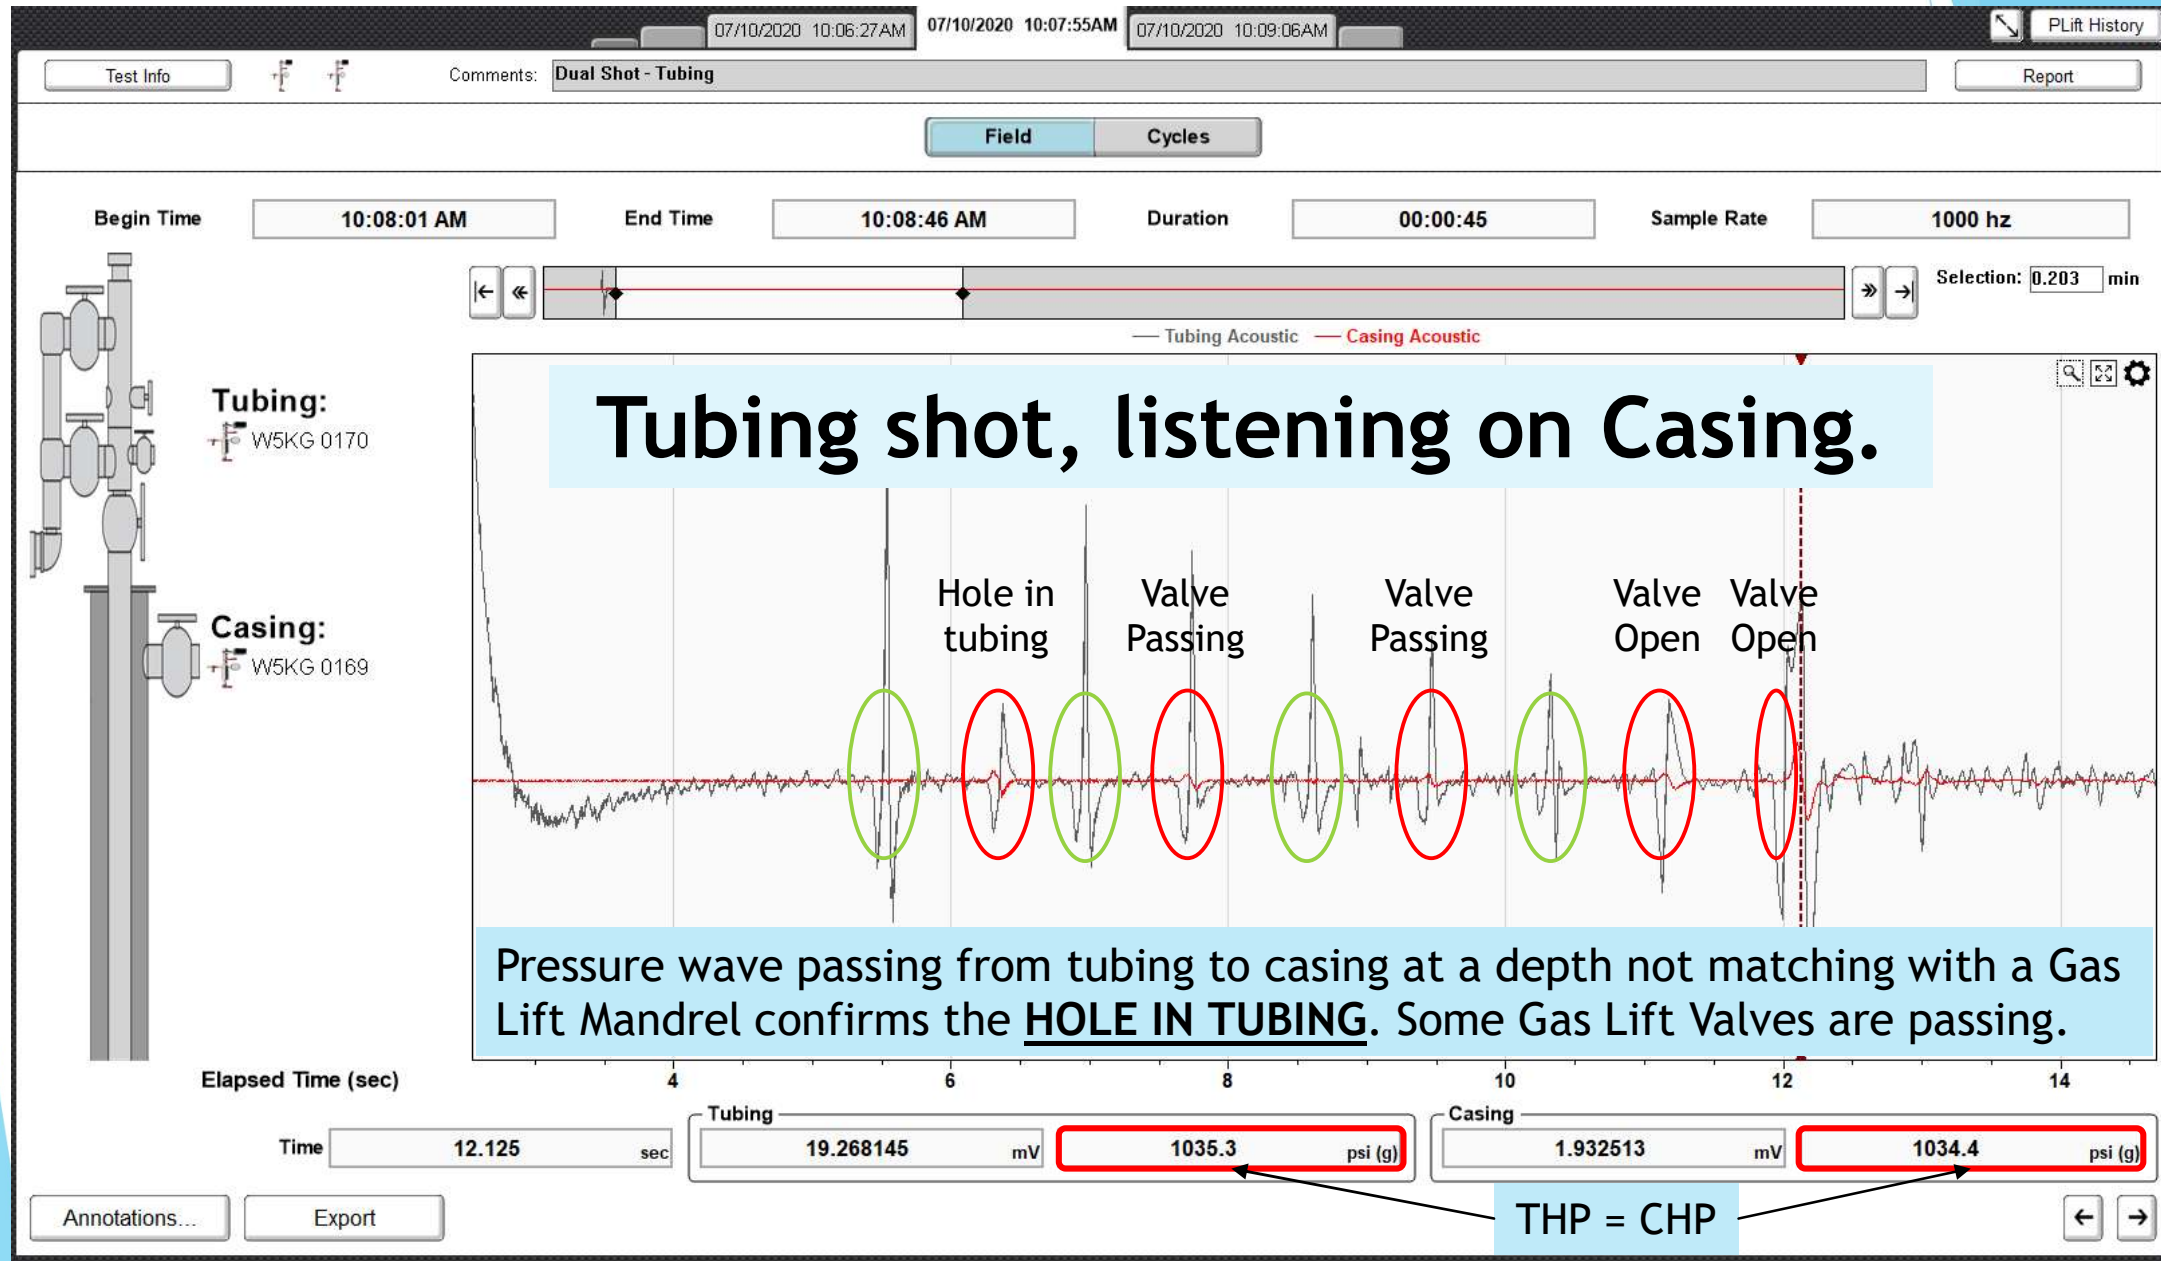


# Well Example 2

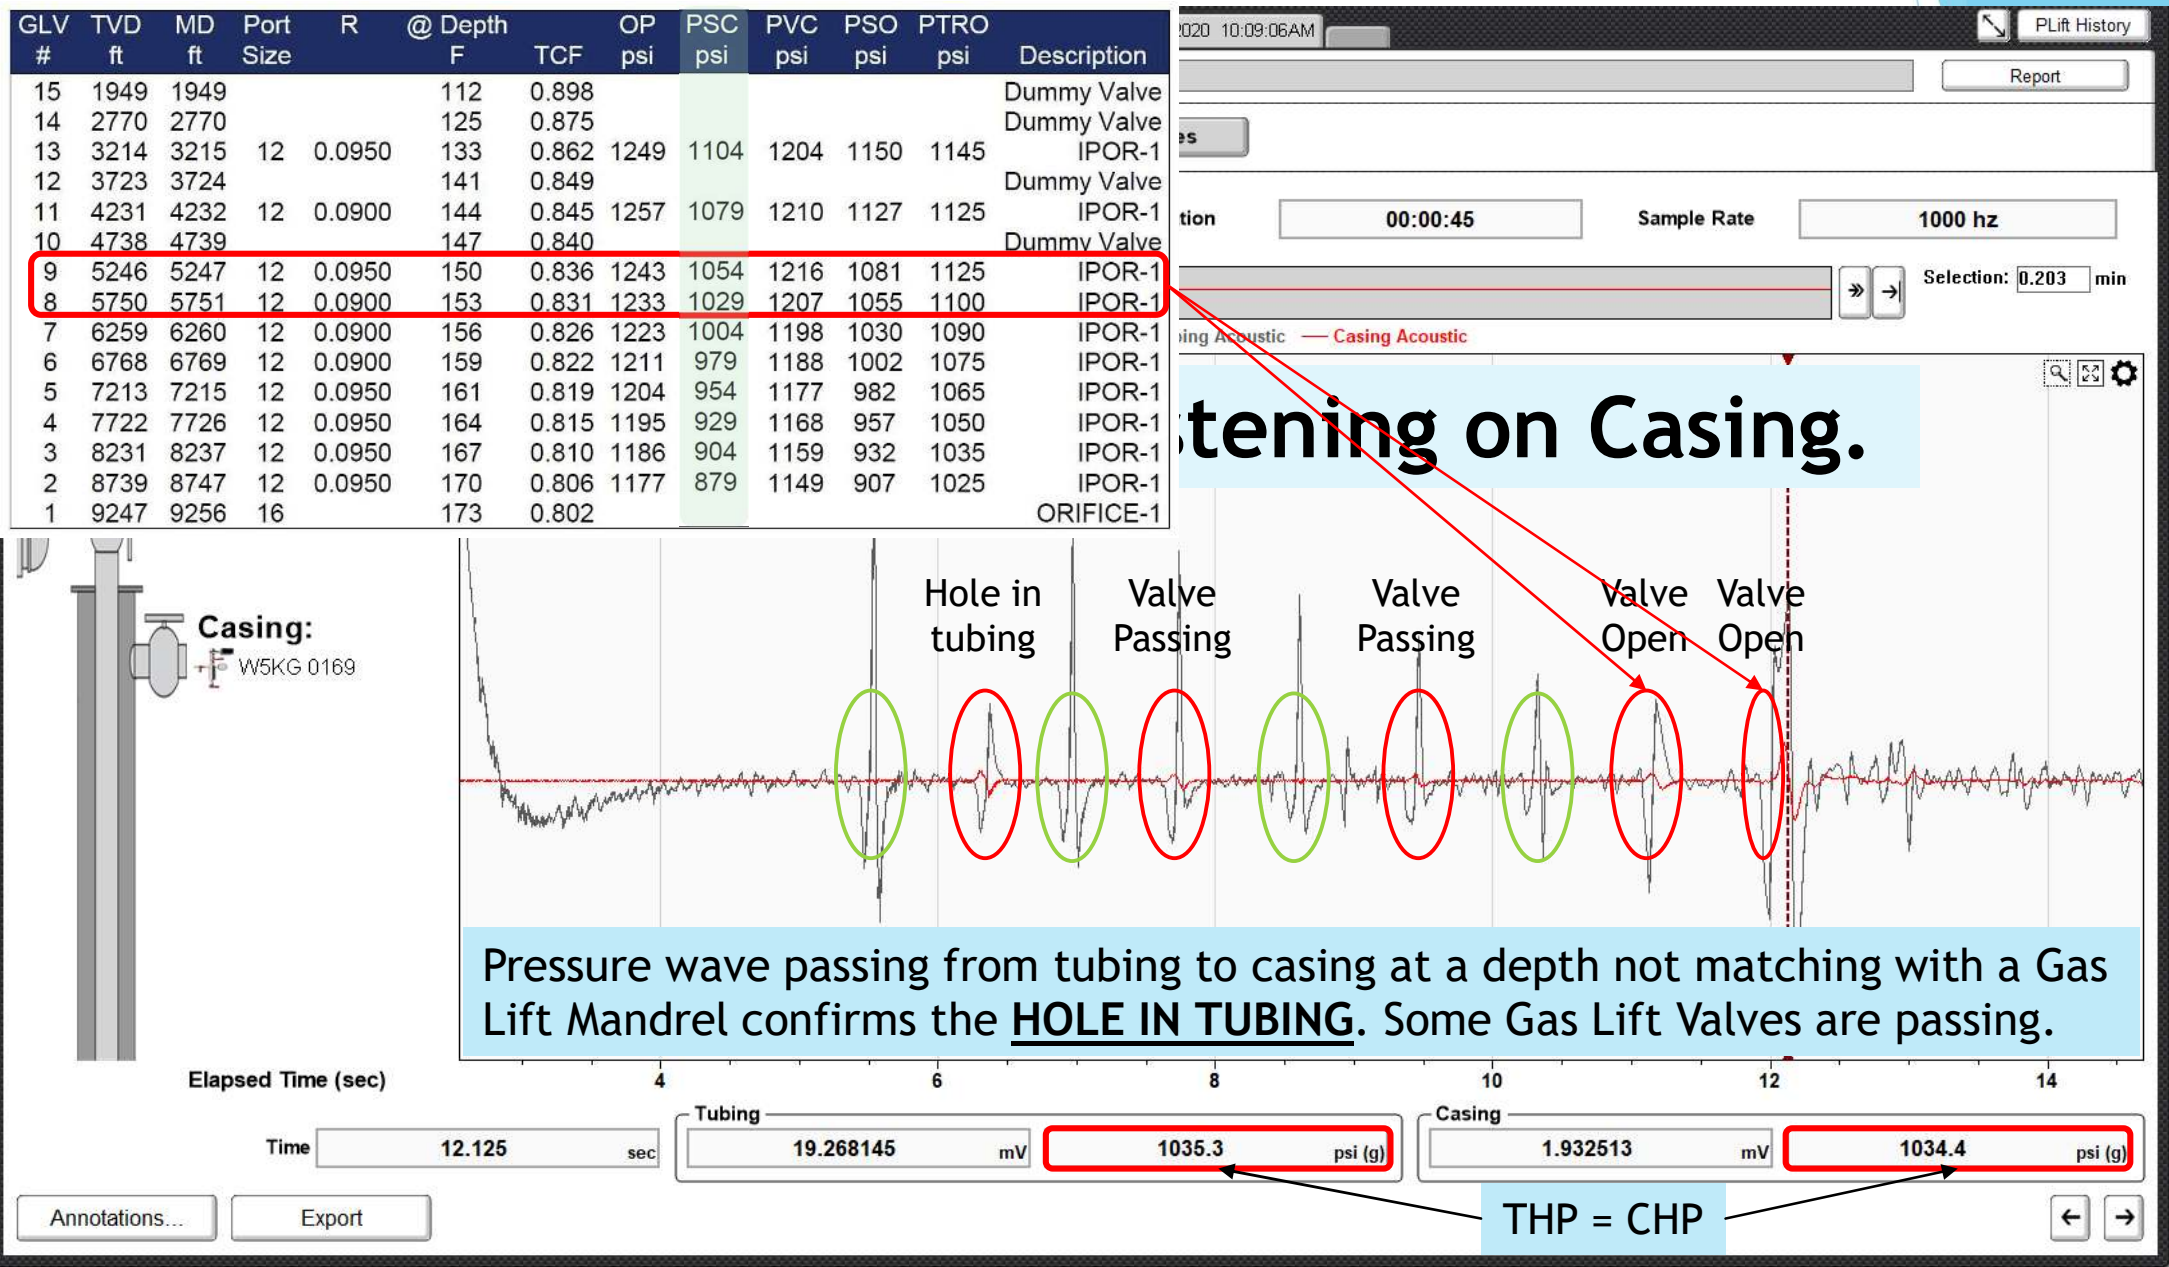



# Well Example 2

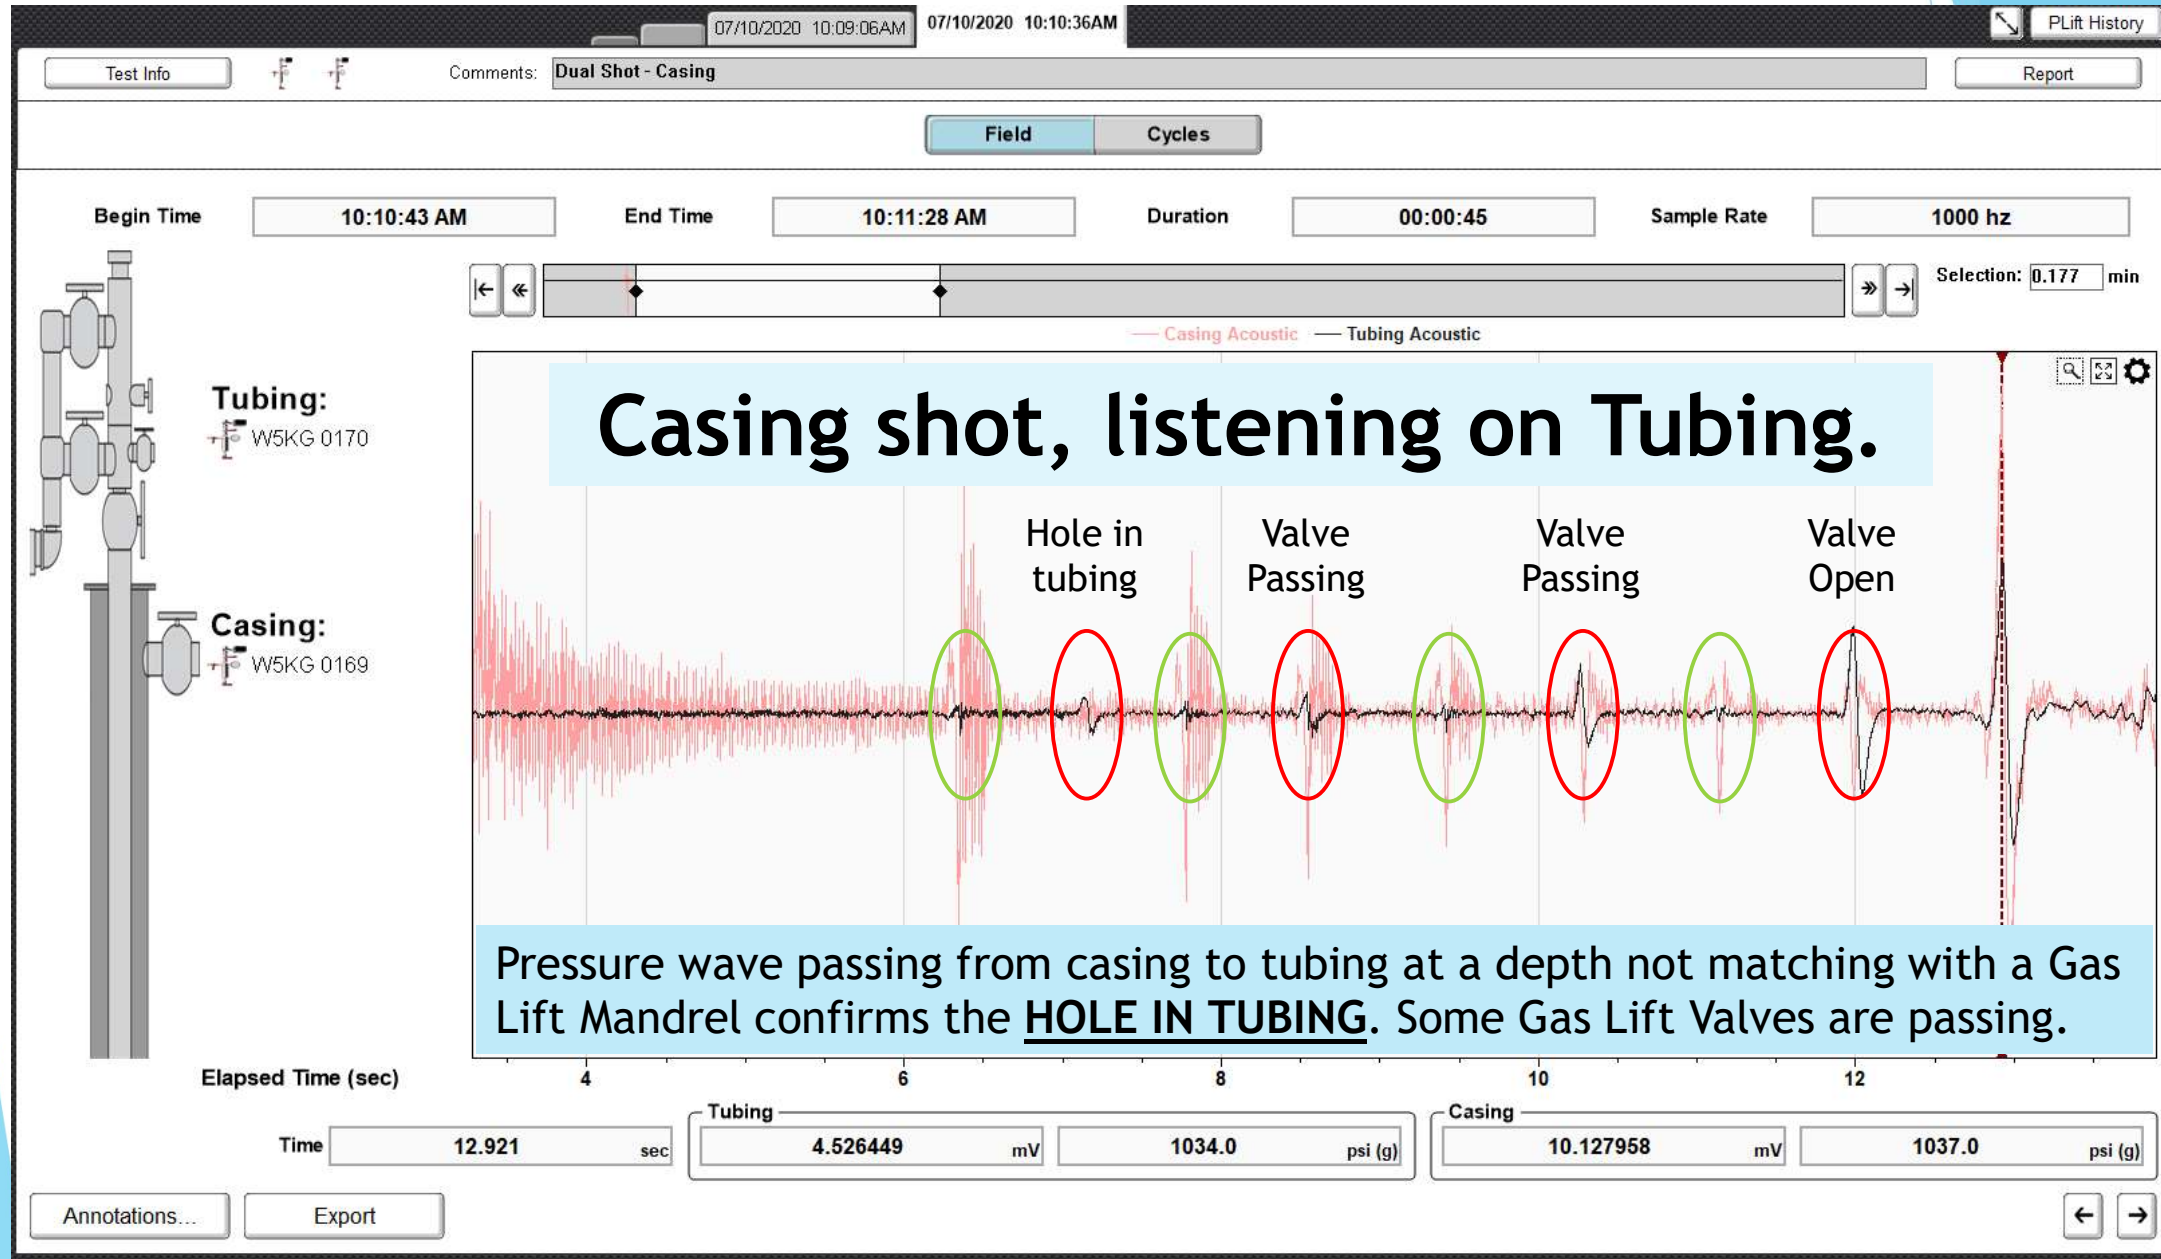





## Well Example 2

Using Gas Lift Mandrel depth as downhole marker to accurately calculate the depth to hole in tubing.

Artificial Lift  
R&D Council

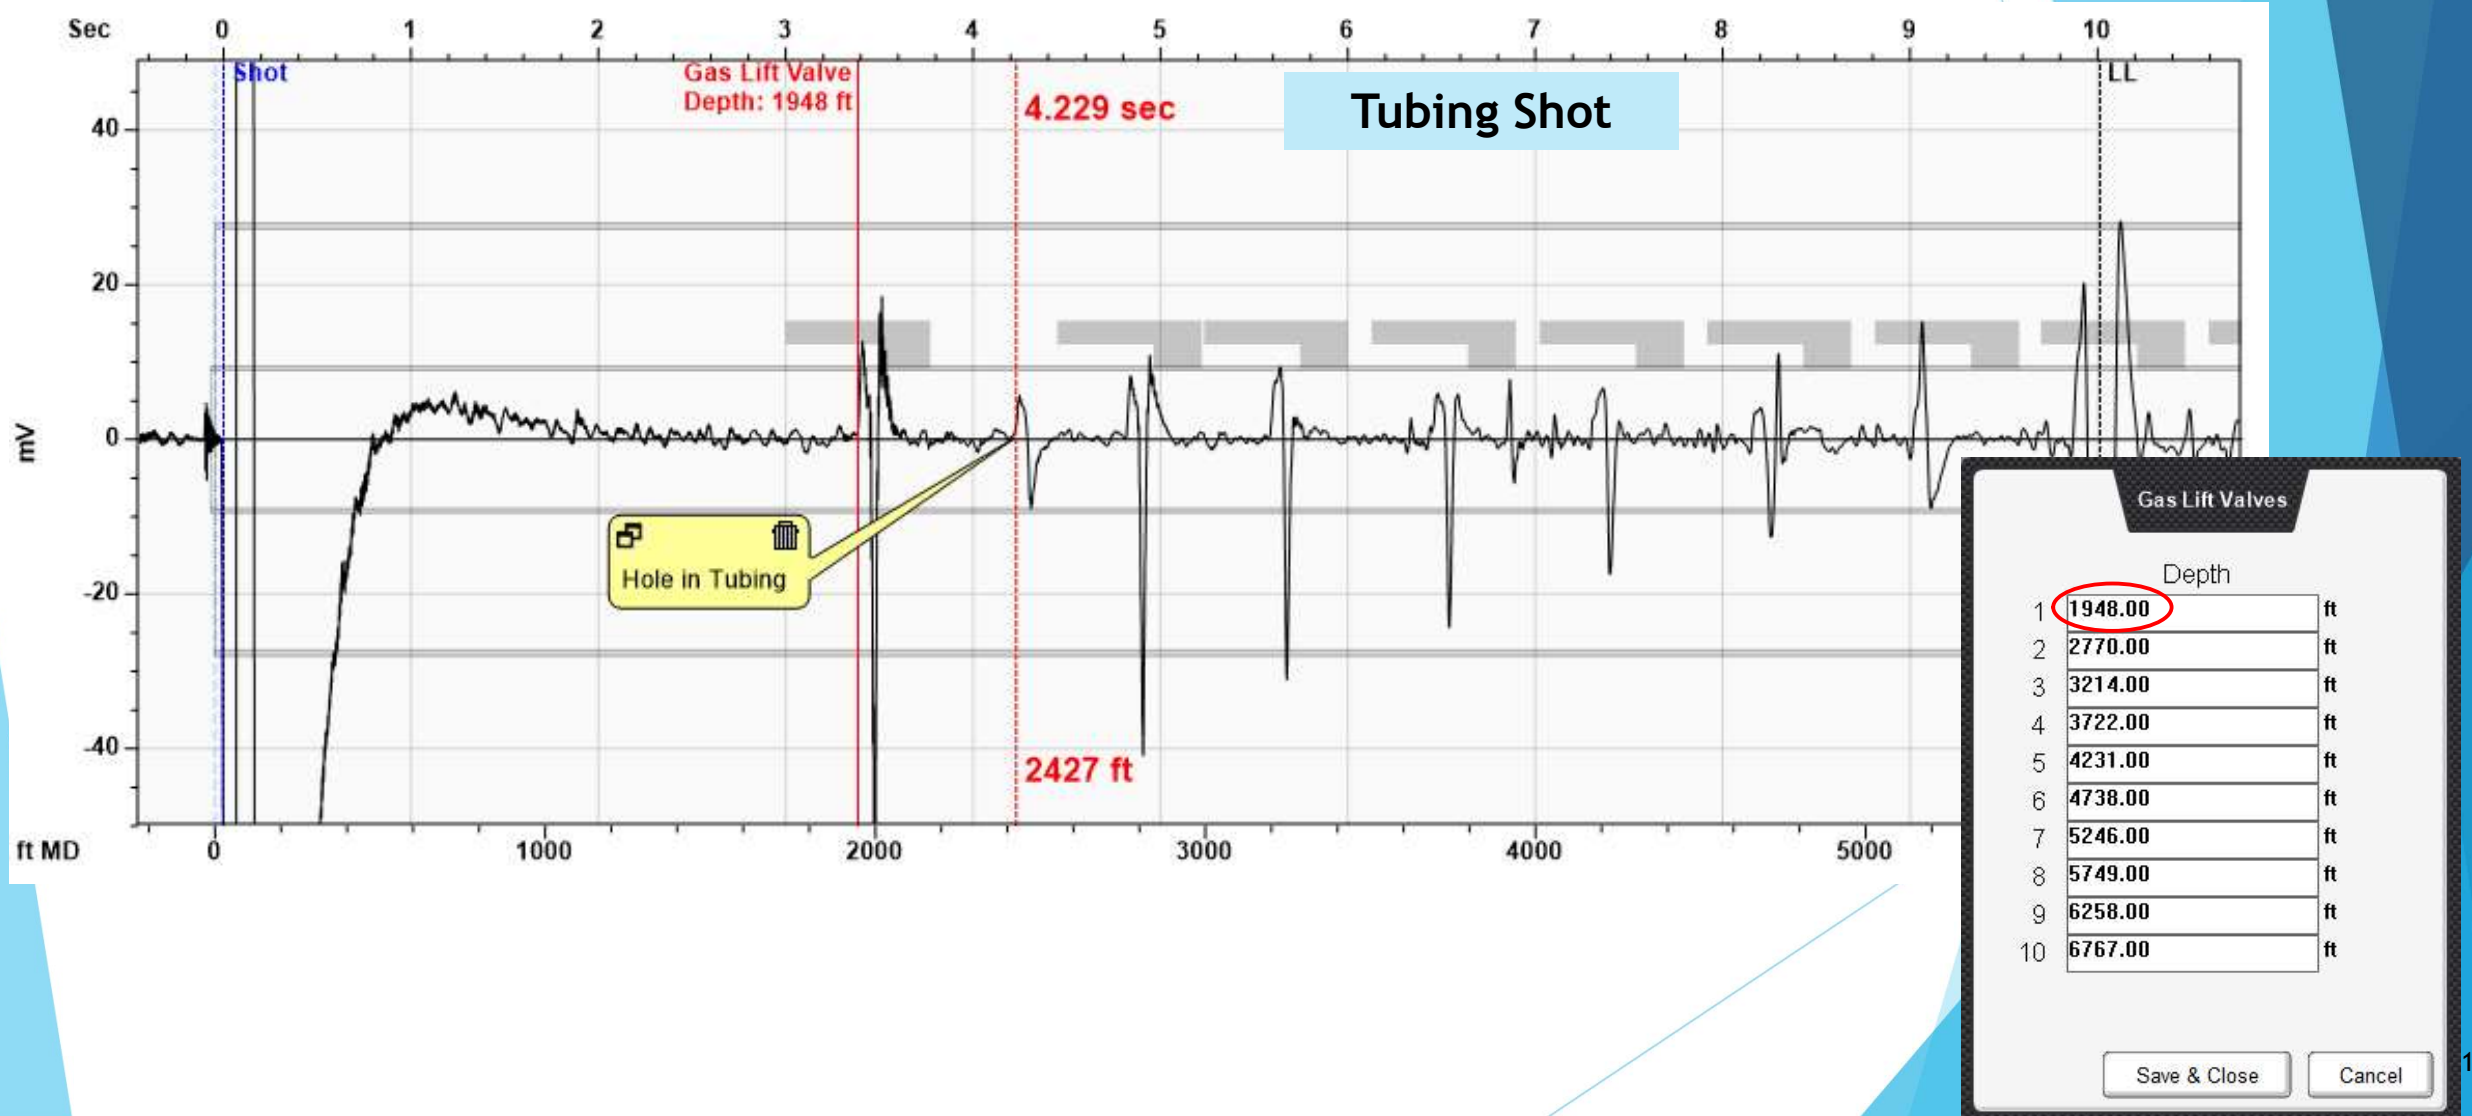

## Well Example 2

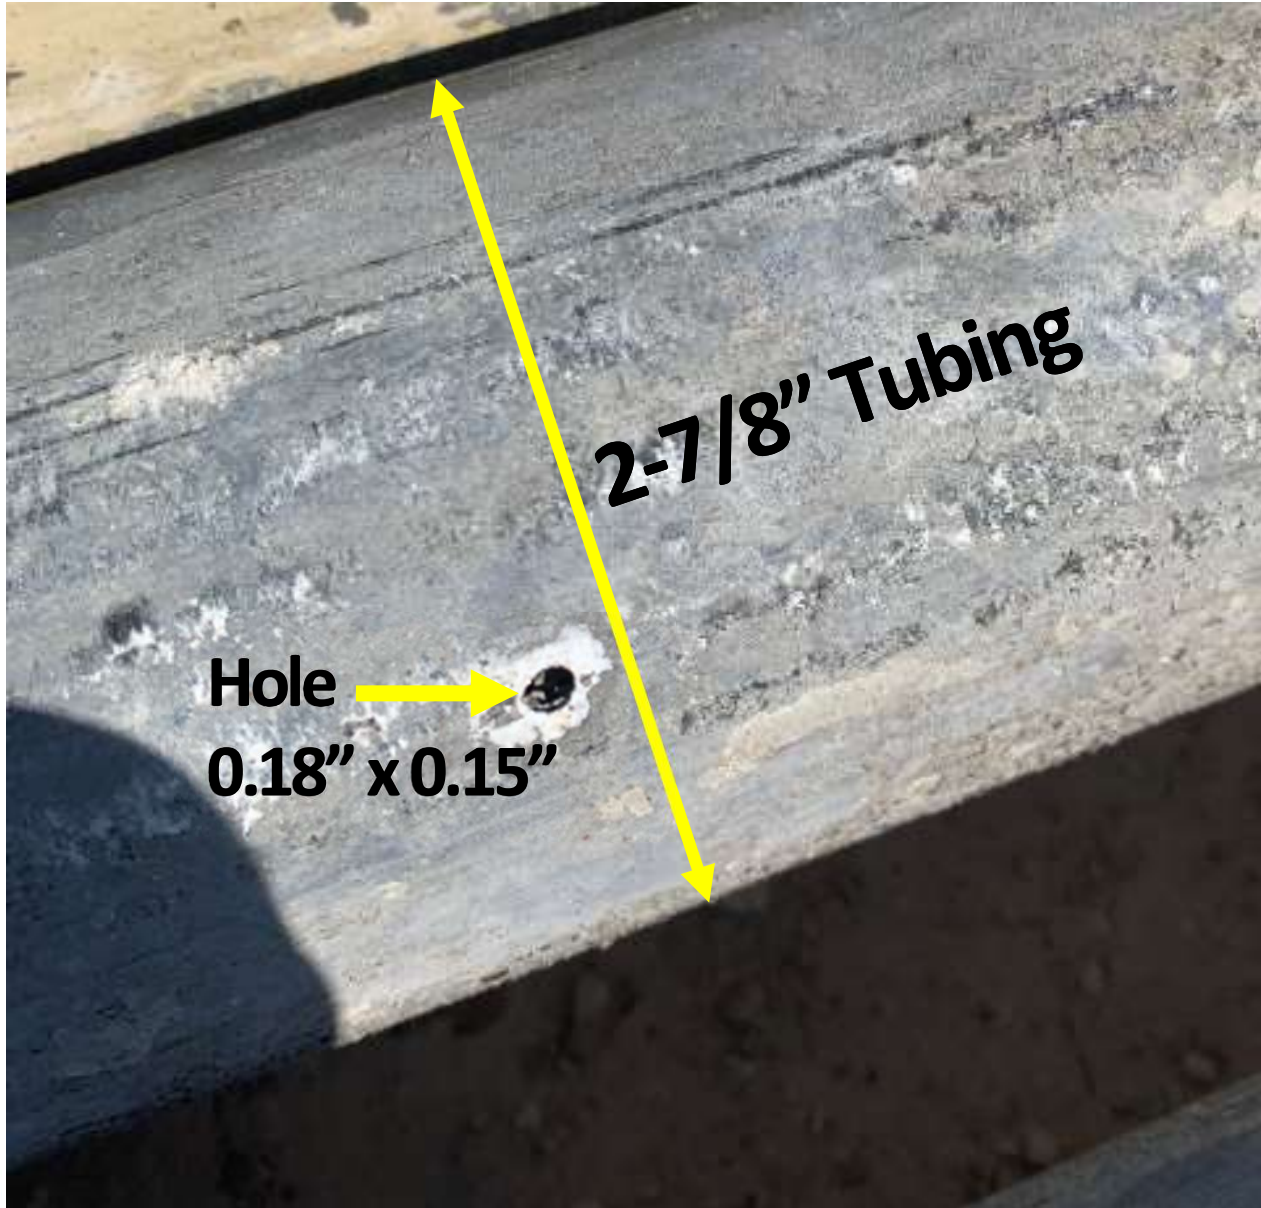


Hole in tubing reported  
in joint #77 from surface.

Artificial Lift  
R&D Council



## Well Example 2

Observation for Tubing shots:  
Mandrel kicks “signature” (shape) changes from good to passing to open.

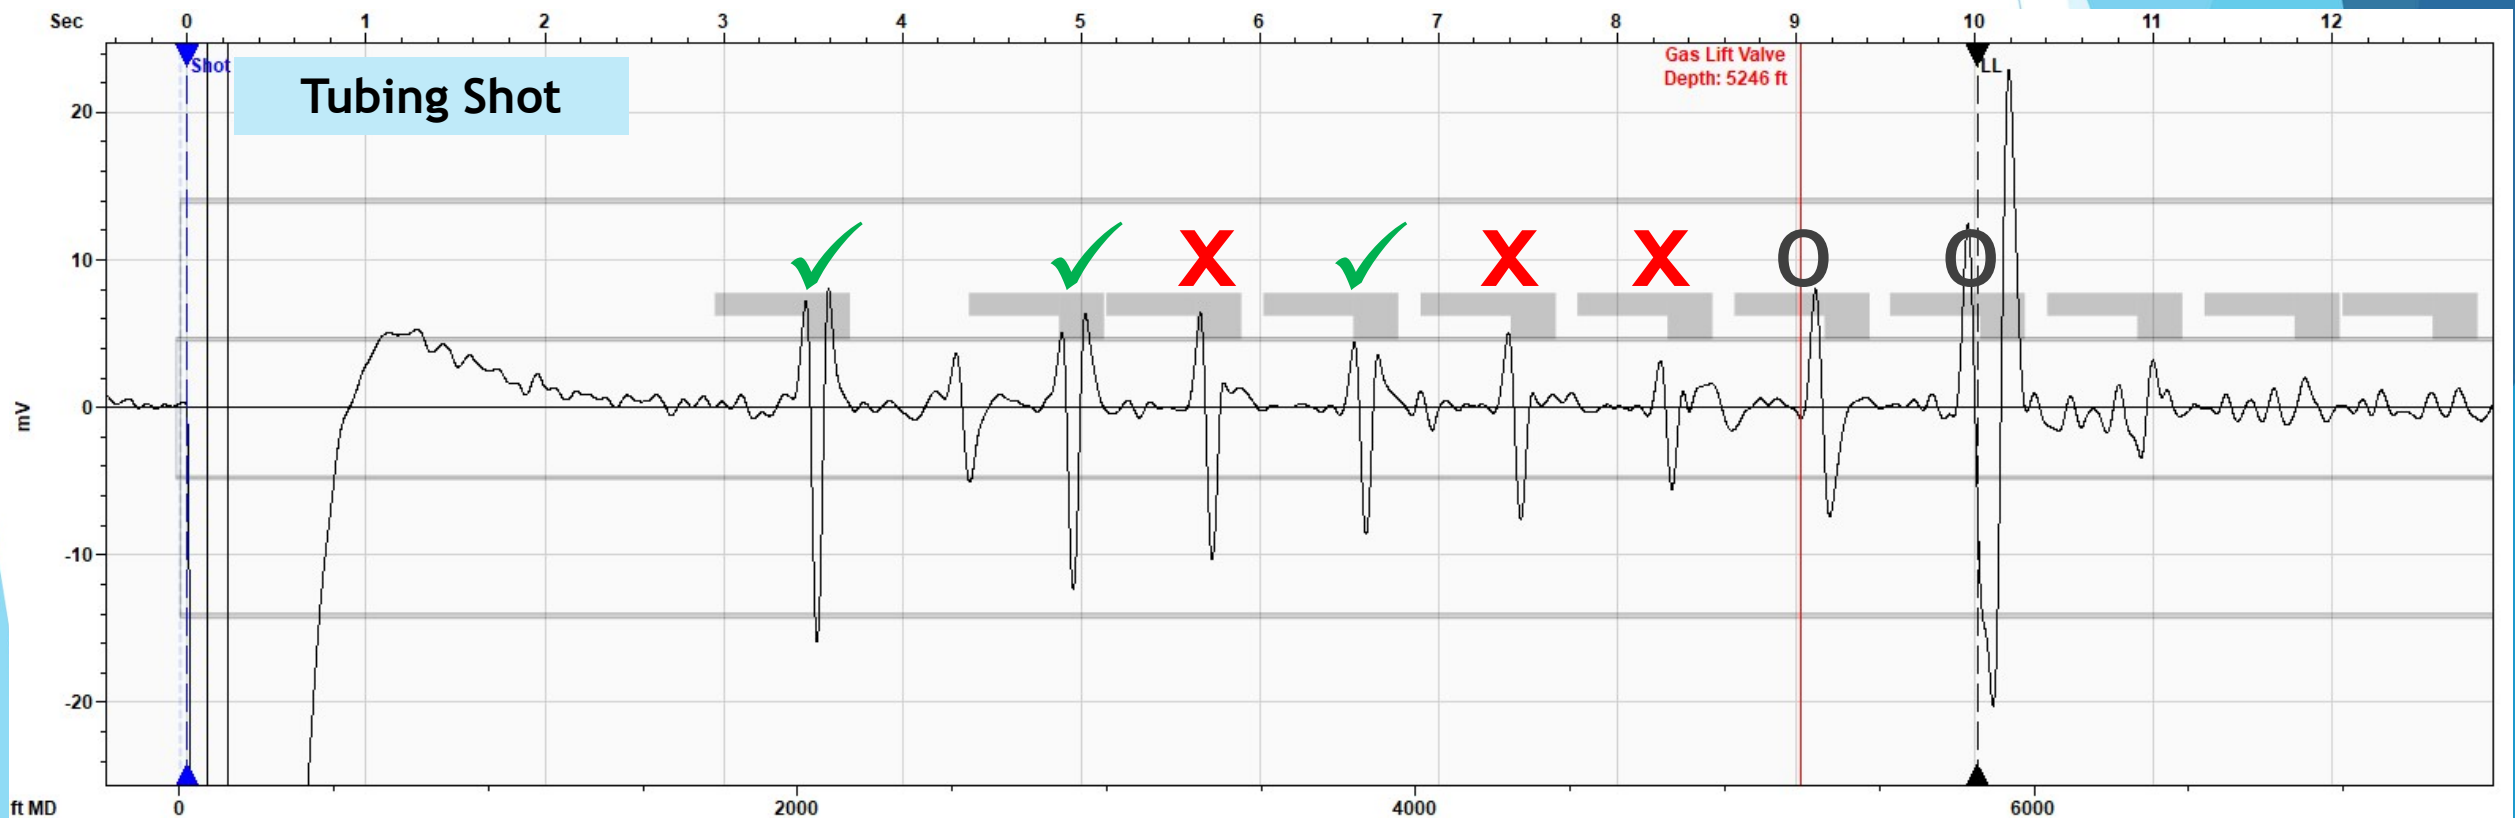

# Well Example 3

Artificial Lift  
R&D Council





## Well Example 3

Workover reported there was no valve in shallower mandrel @ 1918 ft.

### Last 24hr Summary

DLT CONDUCT JSA AND GO CARD SAFETY MEETING LOTO MIRU SLICK LINE (PRECISION) WELL PSI TBG 721 AND CSG 740 RITH W/ GAGE RING TO 4160 HIT SOMETHING POSS. GAS LIFT VALVE COULD NOT PASS THAT POINT POH RITH W/ IMPRESSION BLOCK TAGGED NOTHING RAN DOWN TO 5000 POH RITH W/ KOT RECOVER #10 VALVE @ 3295 RITH W/ KOT TRIED TO RECOVER # 11 VALVE NO LUCK RITH W/ IMPRESSION BLOCK ON KOT TO MANDREL # 11 @ 1918 POH FOUND THERE IS NO GAS LIFT IN # 11 MANDREL RITH W/ NEW VALVE INSTALL # 11 VALVE @ 1918 RITH W/ FISHING TOOL DOWN TO 9151 #1 MANDREL TRIED TO FISH NO LUCK INSTALLED KNUCKLE W/ FISHING TOOL RITH SOME HOW LATCHED # 7 VALVE INSTALL NEW PIN ON # 7 VALVE RITH PUT # 7 VALVE BACK IN PLACE POH SHUT WELL IN VISIT W/ ENGINEER LEFT NUMBER #11 VALVE DOWN HOLE @ 9151 # 1 MANDREL RIG DOWN SLICK HAND WELL OVER TO PRODUCTION GROUP RETURN HOME SAFE

Fluid Level shots and simultaneous acoustic survey were performed to confirm condition reported for workover rig.


Valve at 1918 ft  
should be **CLOSED**  
with CHP=480 psi.

GLV #	TVD ft	MD ft	Port Size	R	@ Depth F	TCF	OP psi	PSC psi	PVC psi	PSO psi	PTRO psi	Description
11	1918	1918	12	0.0950	125	0.876	1157	1040	1097	1100	1060	IPOR-1
10	3294	3295	12	0.0950	135	0.860	1160	1020	1118	1063	1060	IPOR-1
9	4154	4160	12	0.0950	141	0.850	1159	1000	1123	1036	1055	IPOR-1
8	4869	4882	12	0.0950	146	0.842	1160	980	1125	1016	1045	IPOR-1
7	5580	5600	12	0.0950	150	0.836	1158	960	1126	993	1040	IPOR-1
6	6218	6243	12	0.0950	153	0.832	1159	940	1125	974	1035	IPOR-1
5	6892	6918	12	0.0950	156	0.827	1157	920	1125	952	1030	IPOR-1
4	7527	7553	12	0.0950	158	0.824	1156	900	1123	933	1025	IPOR-1
3	8168	8194	12	0.0950	160	0.821	1154	880	1122	911	1020	IPOR-1
2	8782	8808	12	0.0950	161	0.820	1139	860	1121	879	1015	IPOR-1
1	9119	9151	12	0.0950	162	0.818	1033	760	1031	763	930	IPOR-1

# Well Example 3

Initial single Casing shot, prior simultaneous acoustic acquisition.

Artificial Lift  
R&D Council

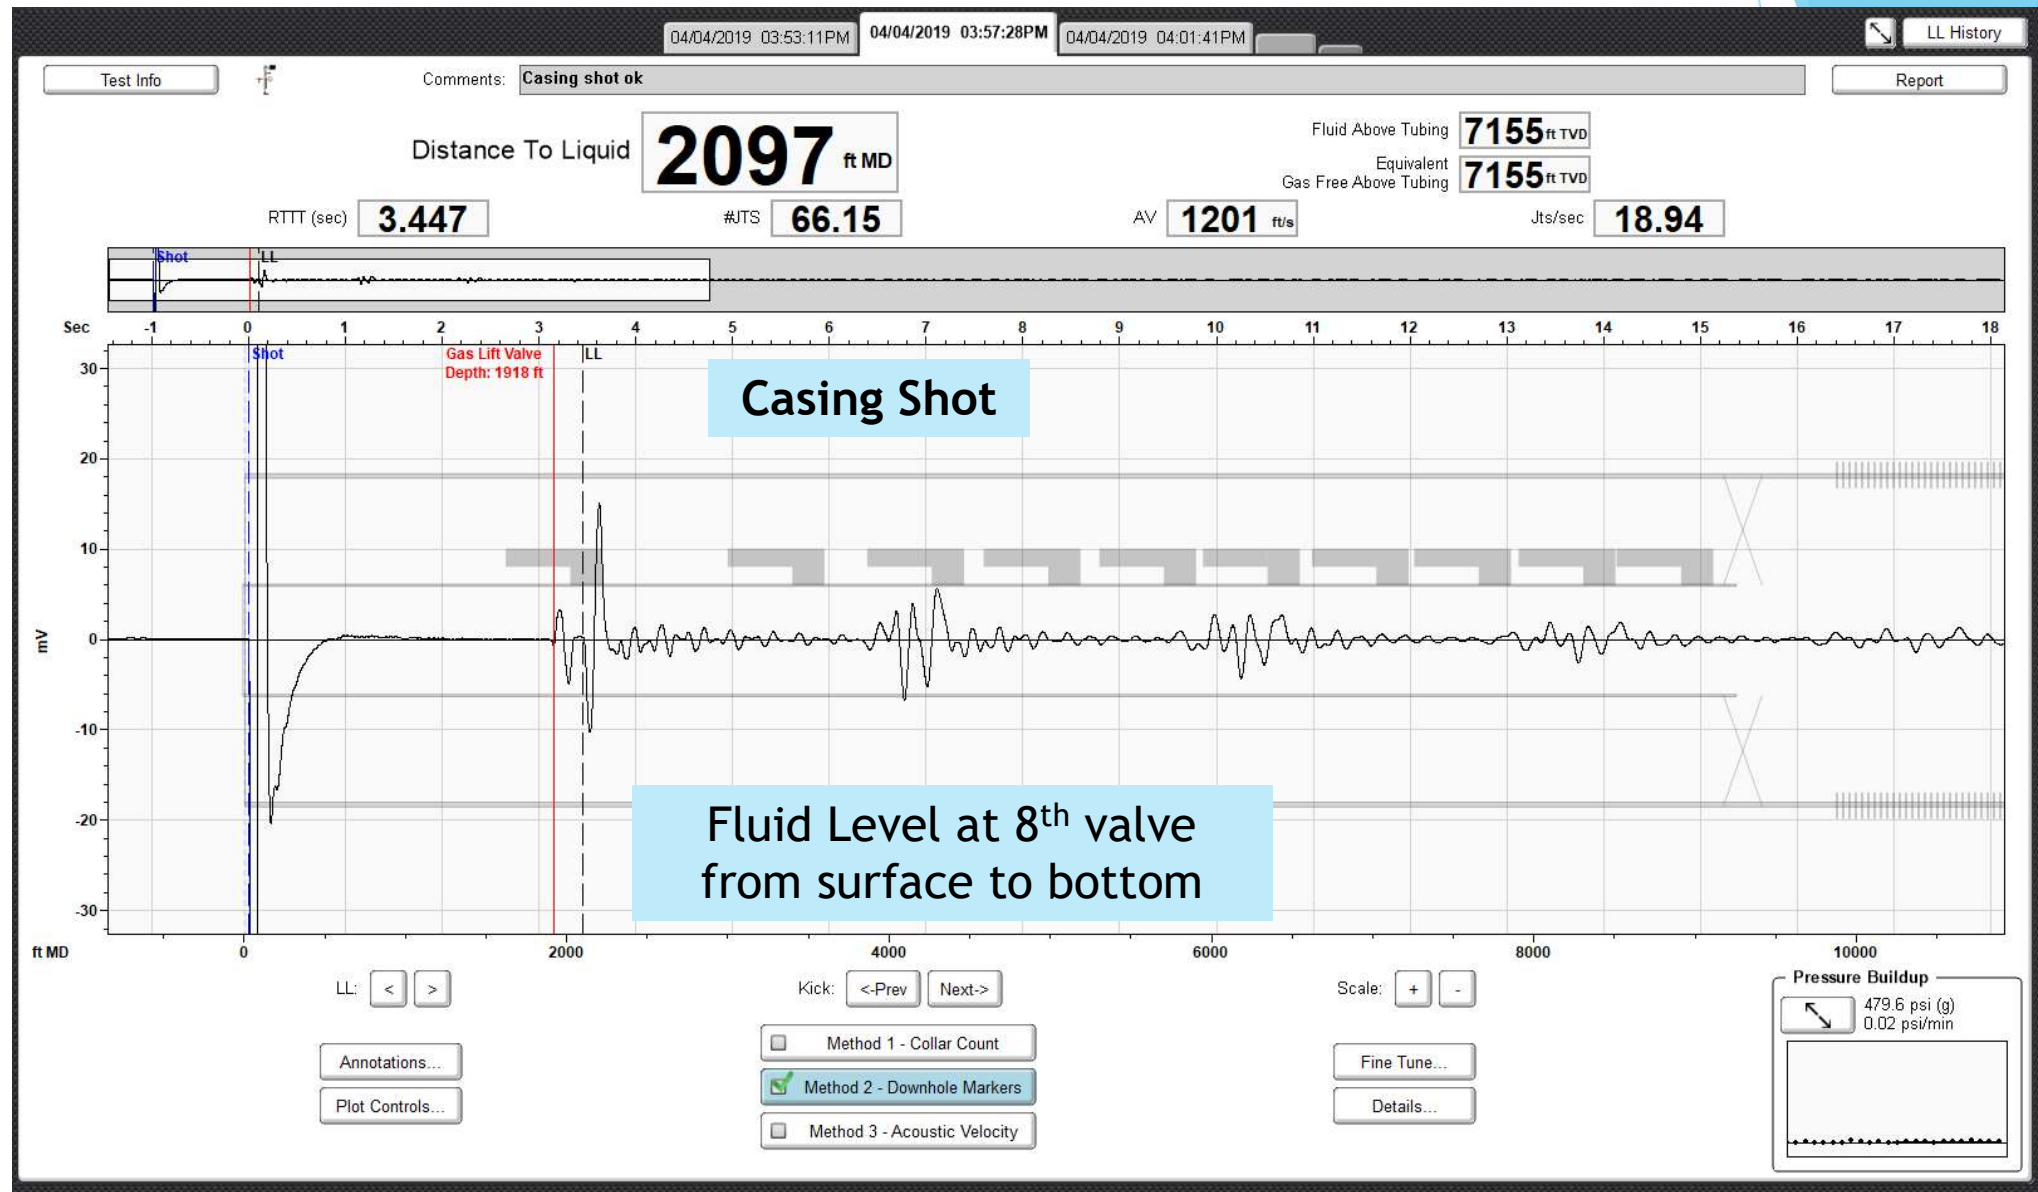




# Well Example 3

Initial single Tubing shot, prior simultaneous acoustic acquisition.

Artificial Lift  
R&D Council

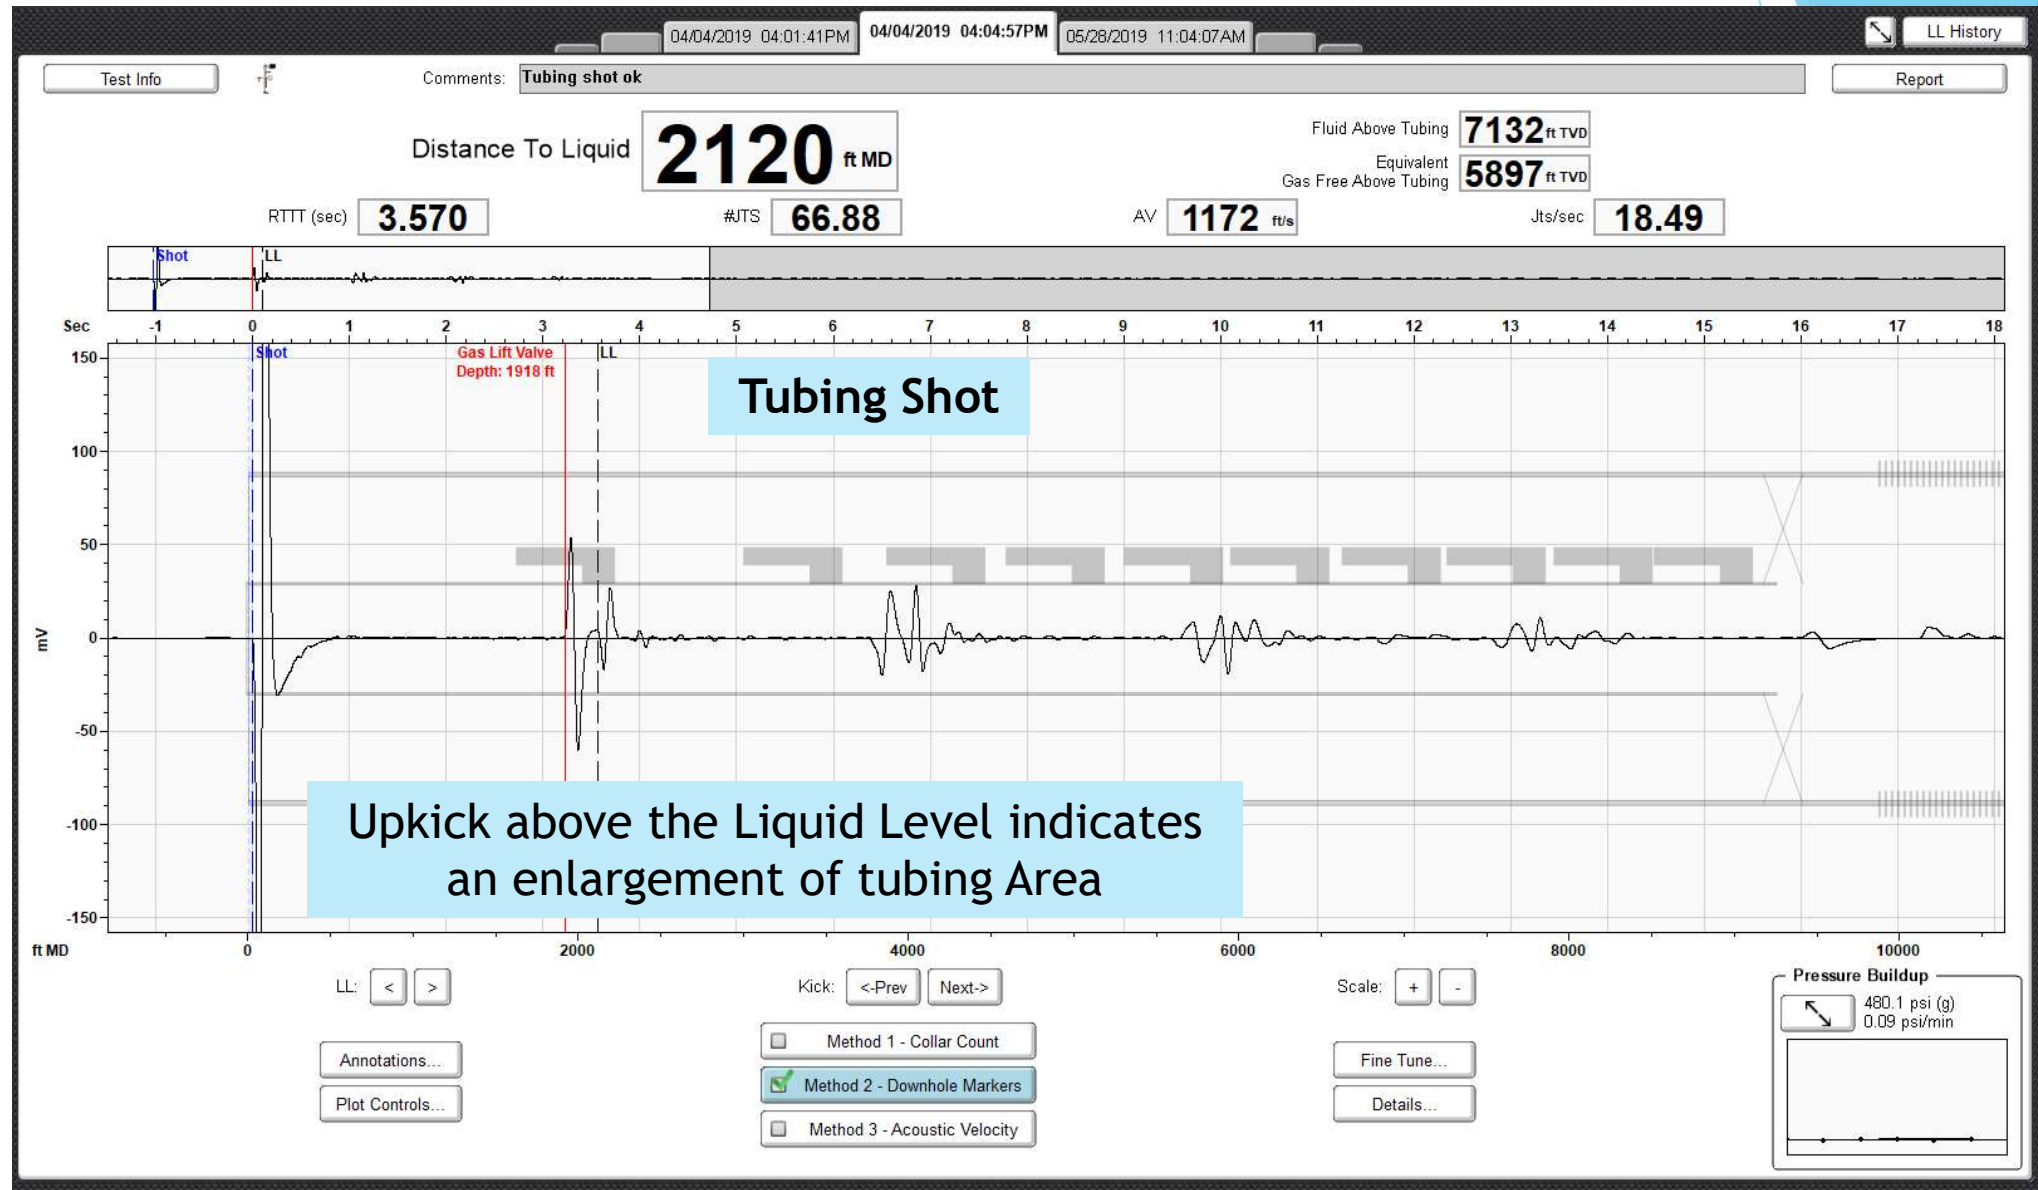

# Well Example 3


## Simultaneous acoustic acquisition

Tubing:

W5KG 0169

Casing:

W5KG 0170

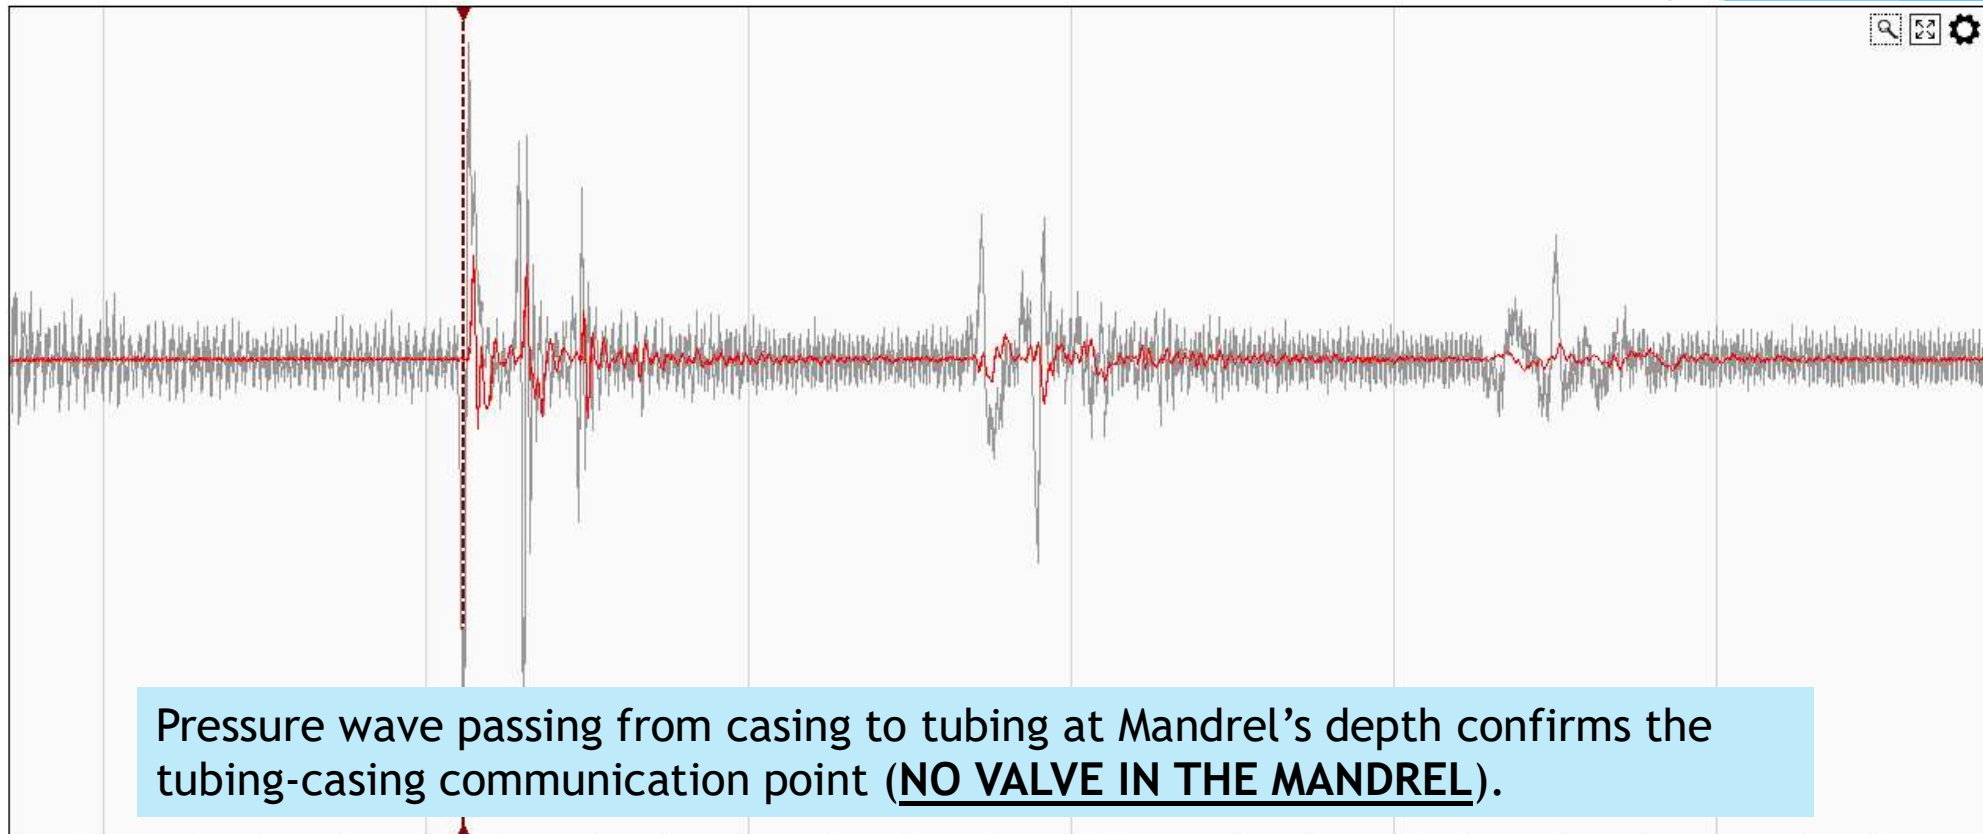

Time 04:08:54 PM 04:08:56 PM 04:08:58 PM 04:09:00 PM 04:09:02 PM 04:09:04 PM

Time		Tubing		Casing	
04:08:56 PM	clock	-45.344463	mV	478.5	psi (g)
				-0.077737	mV
				480.1	psi (g)



# Well Example 4

Artificial Lift  
R&D Council



# Well Example 4

Initial single Casing shot, prior simultaneous acoustic acquisition.


Artificial Lift  
R&D Council



# Well Example 4

Initial single Tubing shot, prior simultaneous acoustic acquisition.


Artificial Lift  
R&D Council

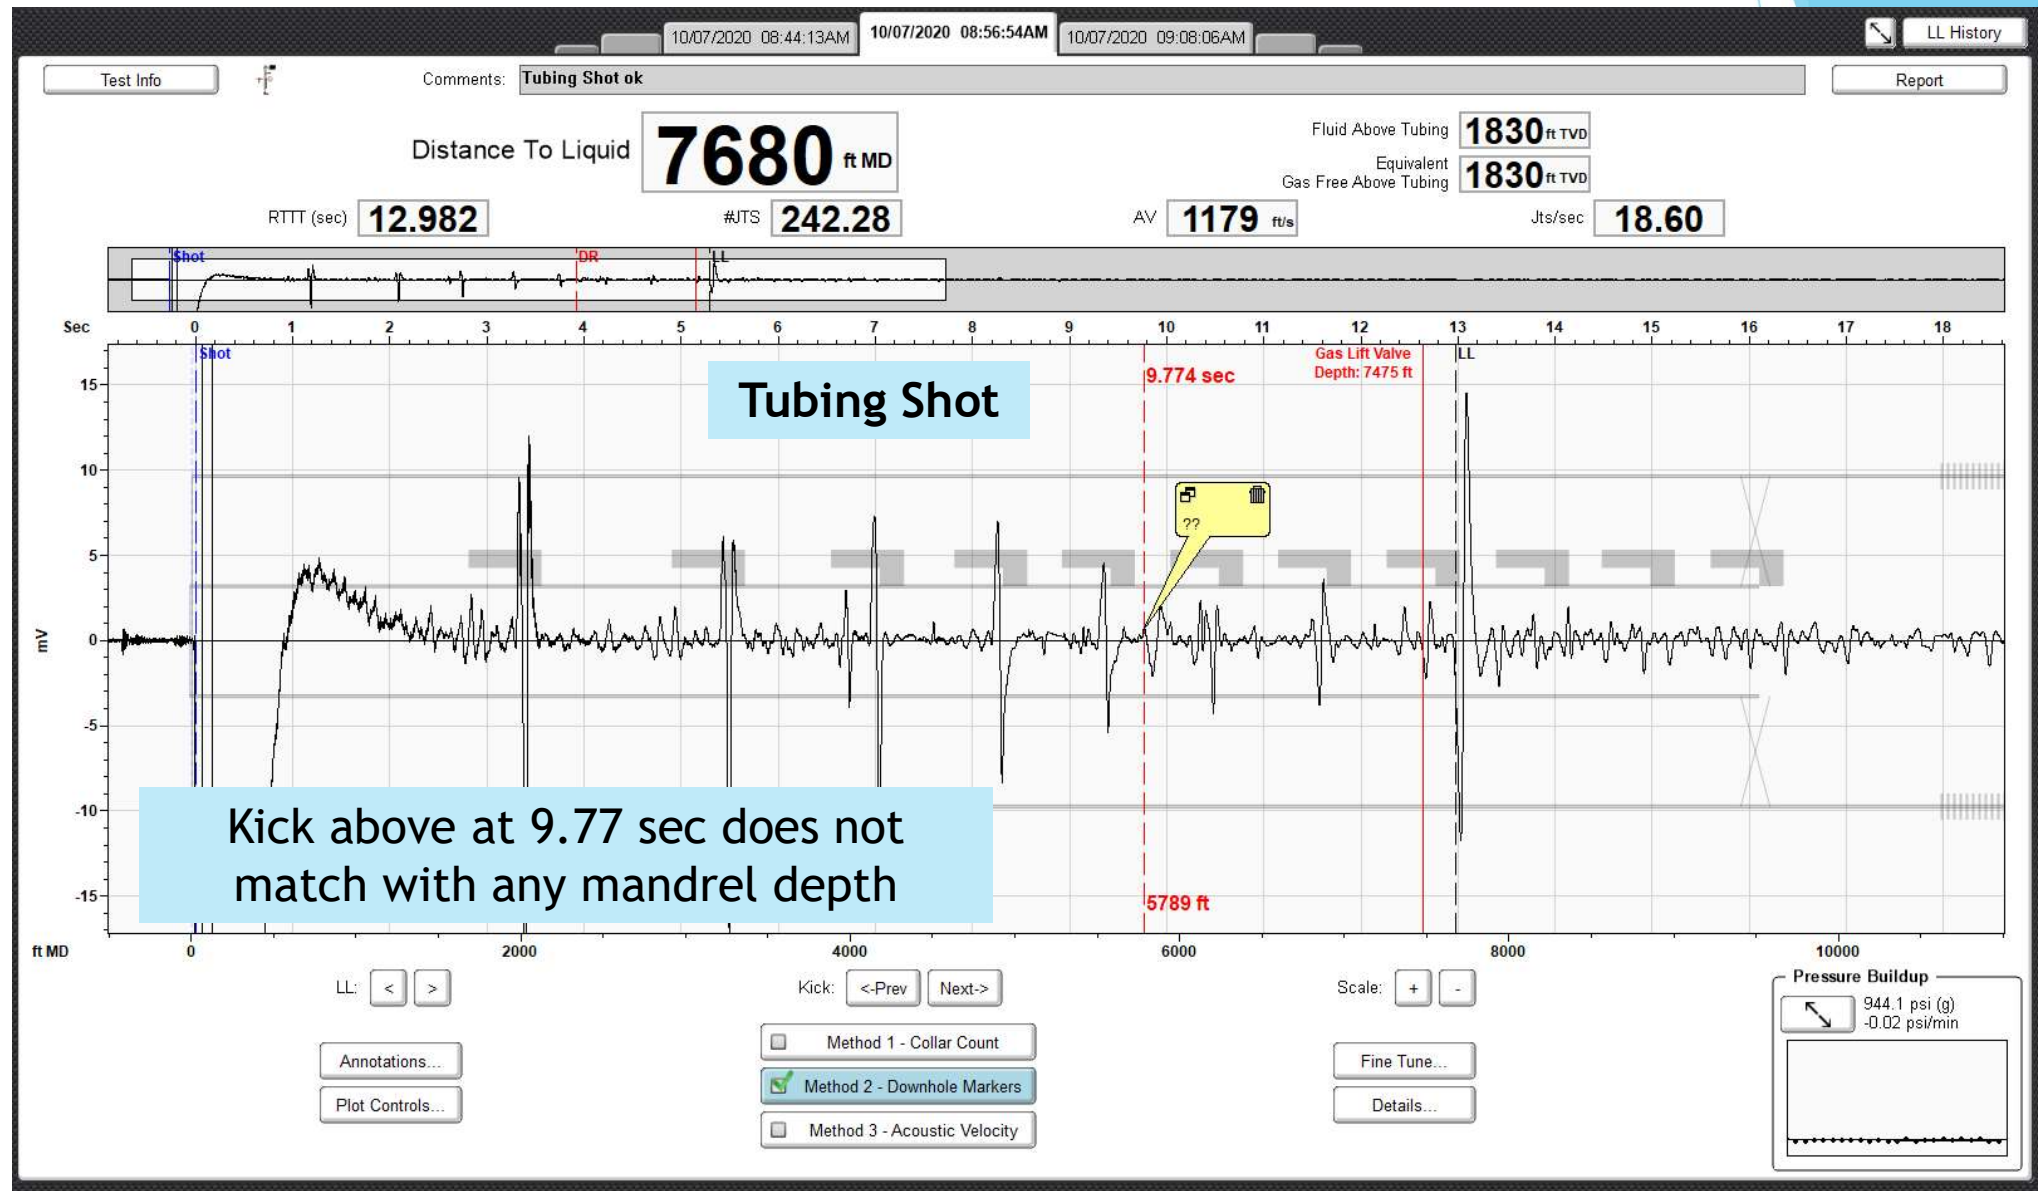

# Well Example 4

## Simultaneous acoustic acquisition

Artificial Lift  
R&D Council

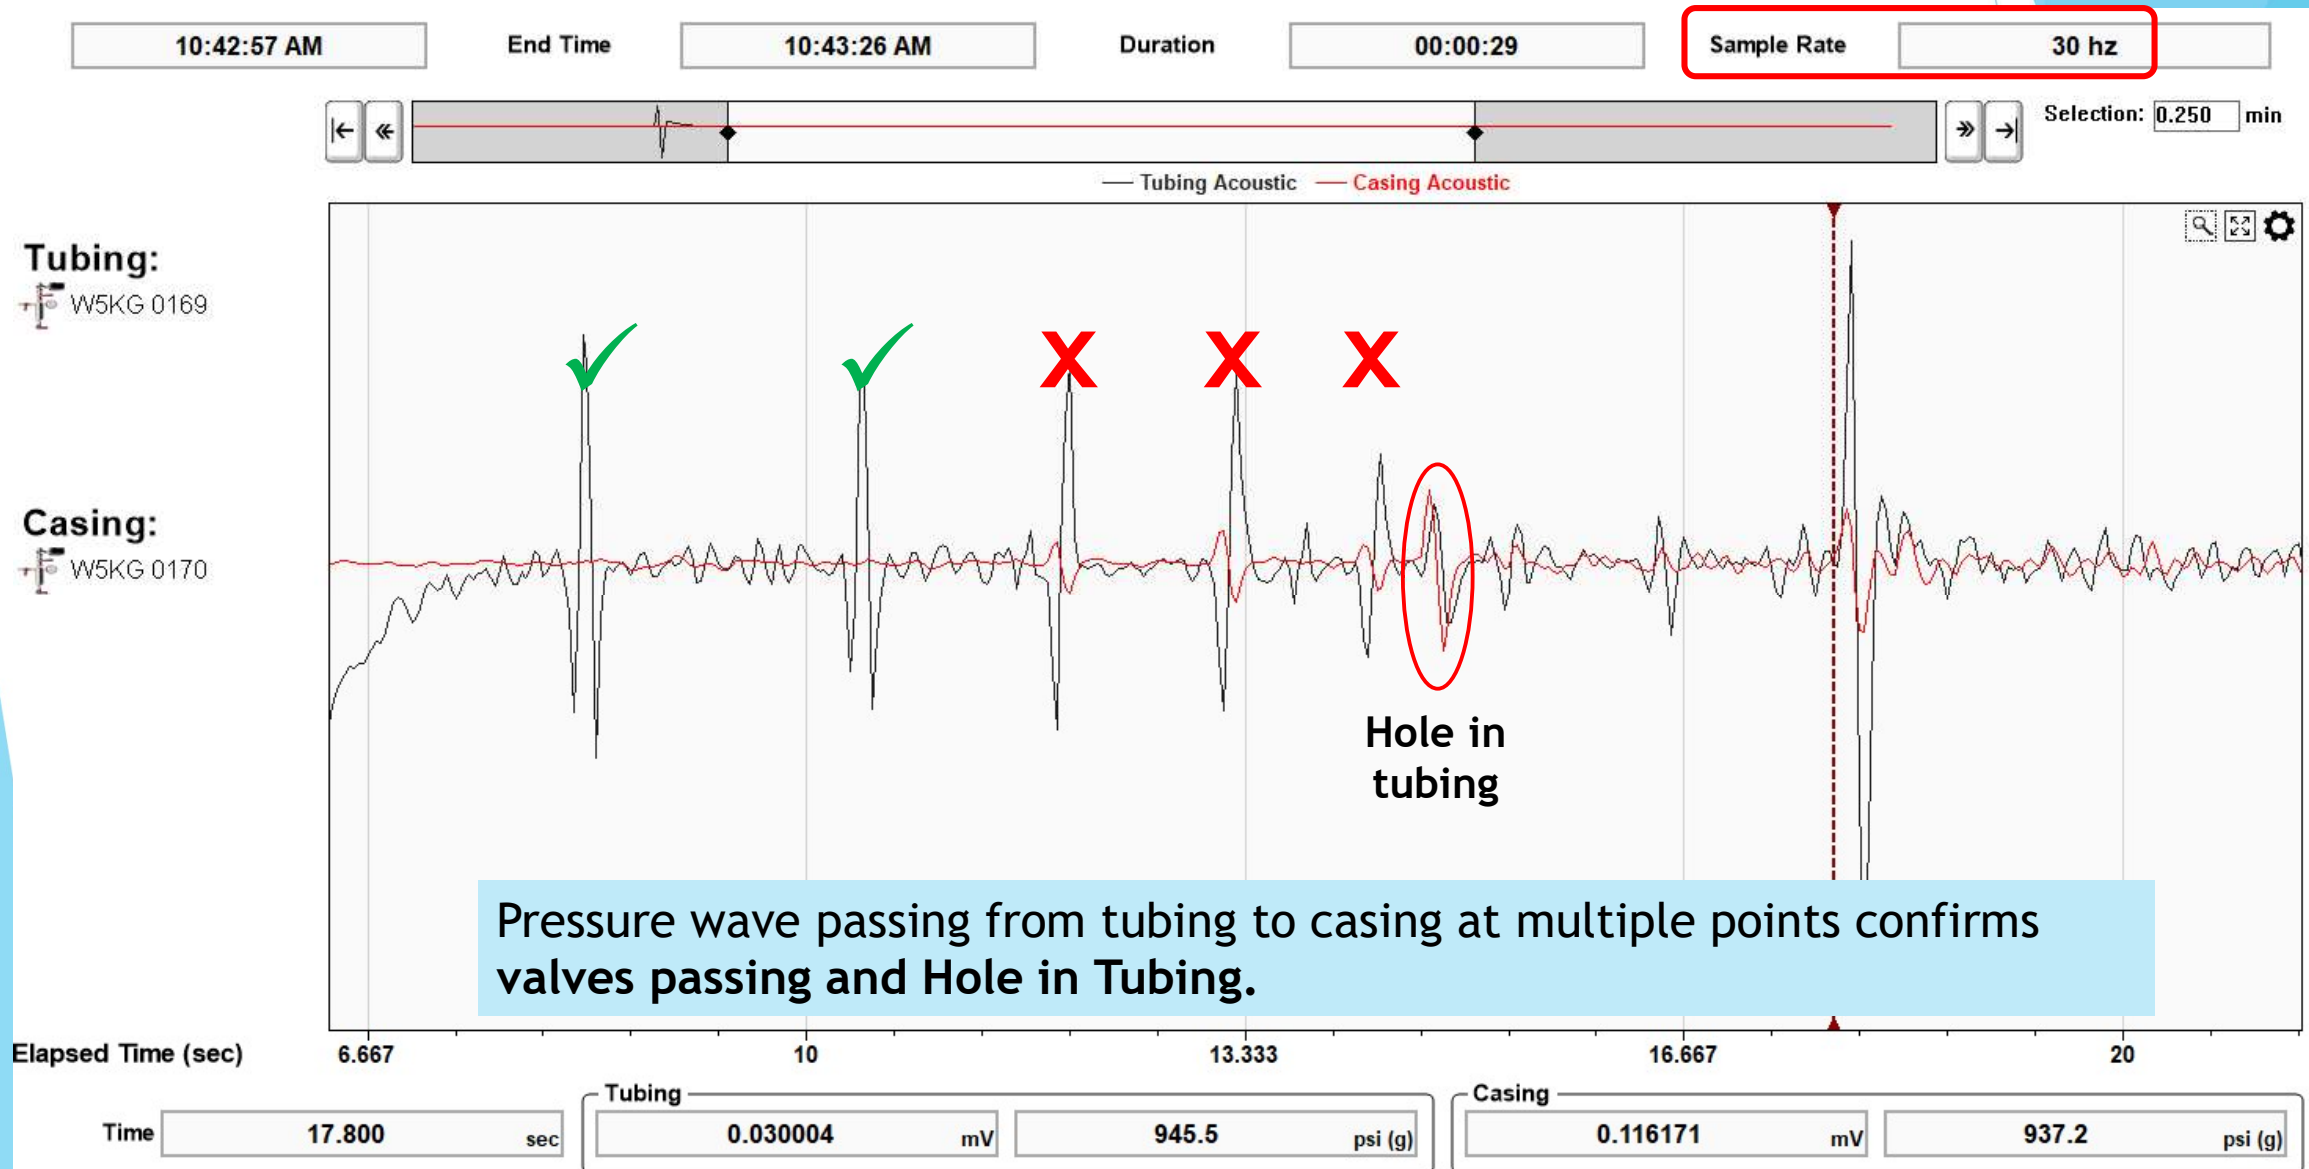



# Well Example 5


Artificial Lift  
R&D Council



# Well Example 5

Initial single Tubing shot, prior simultaneous acoustic acquisition.


Artificial Lift  
R&D Council

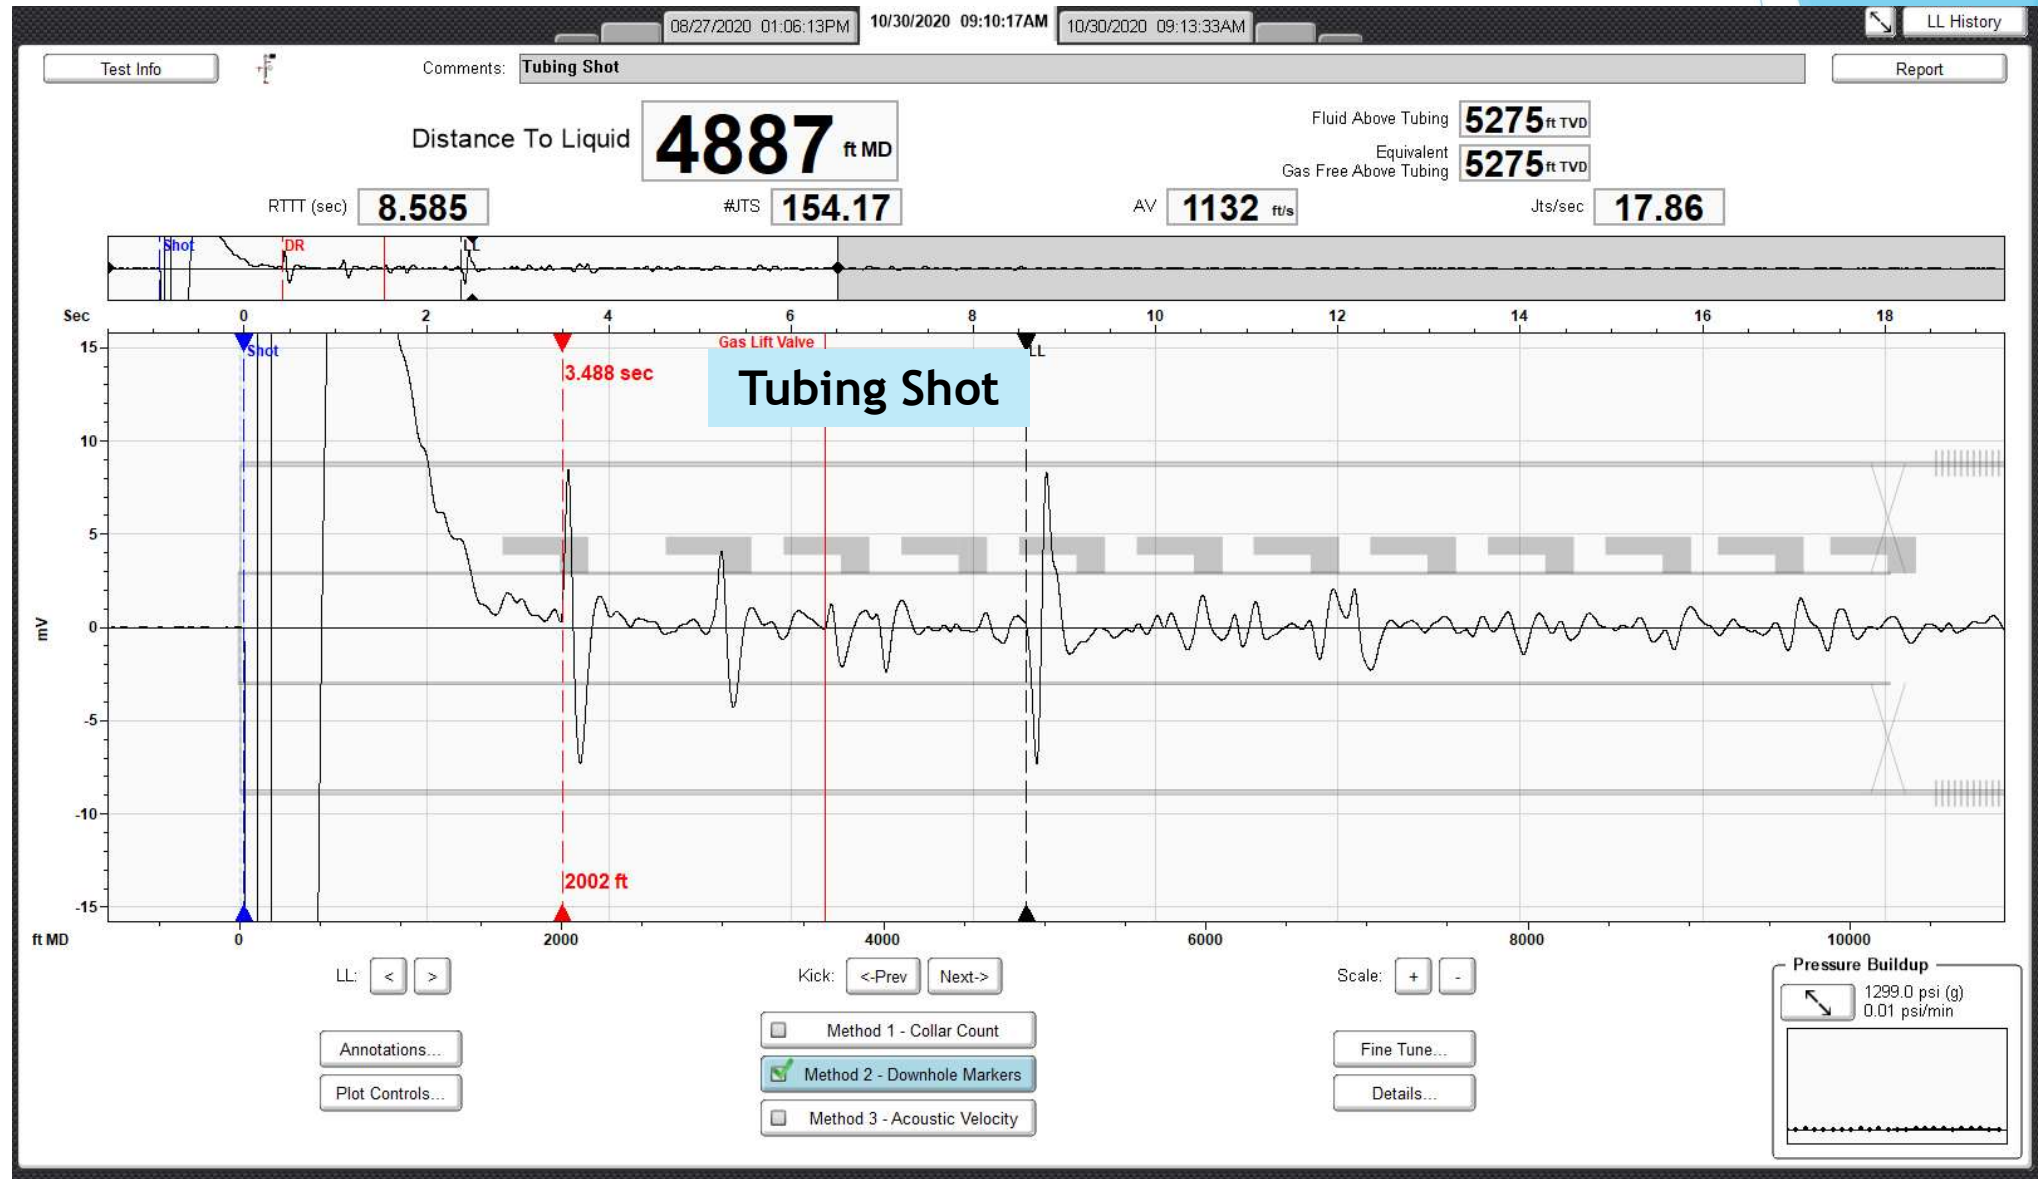

# Well Example 5



## Simultaneous acoustic acquisition

Artificial Lift  
R&D Council

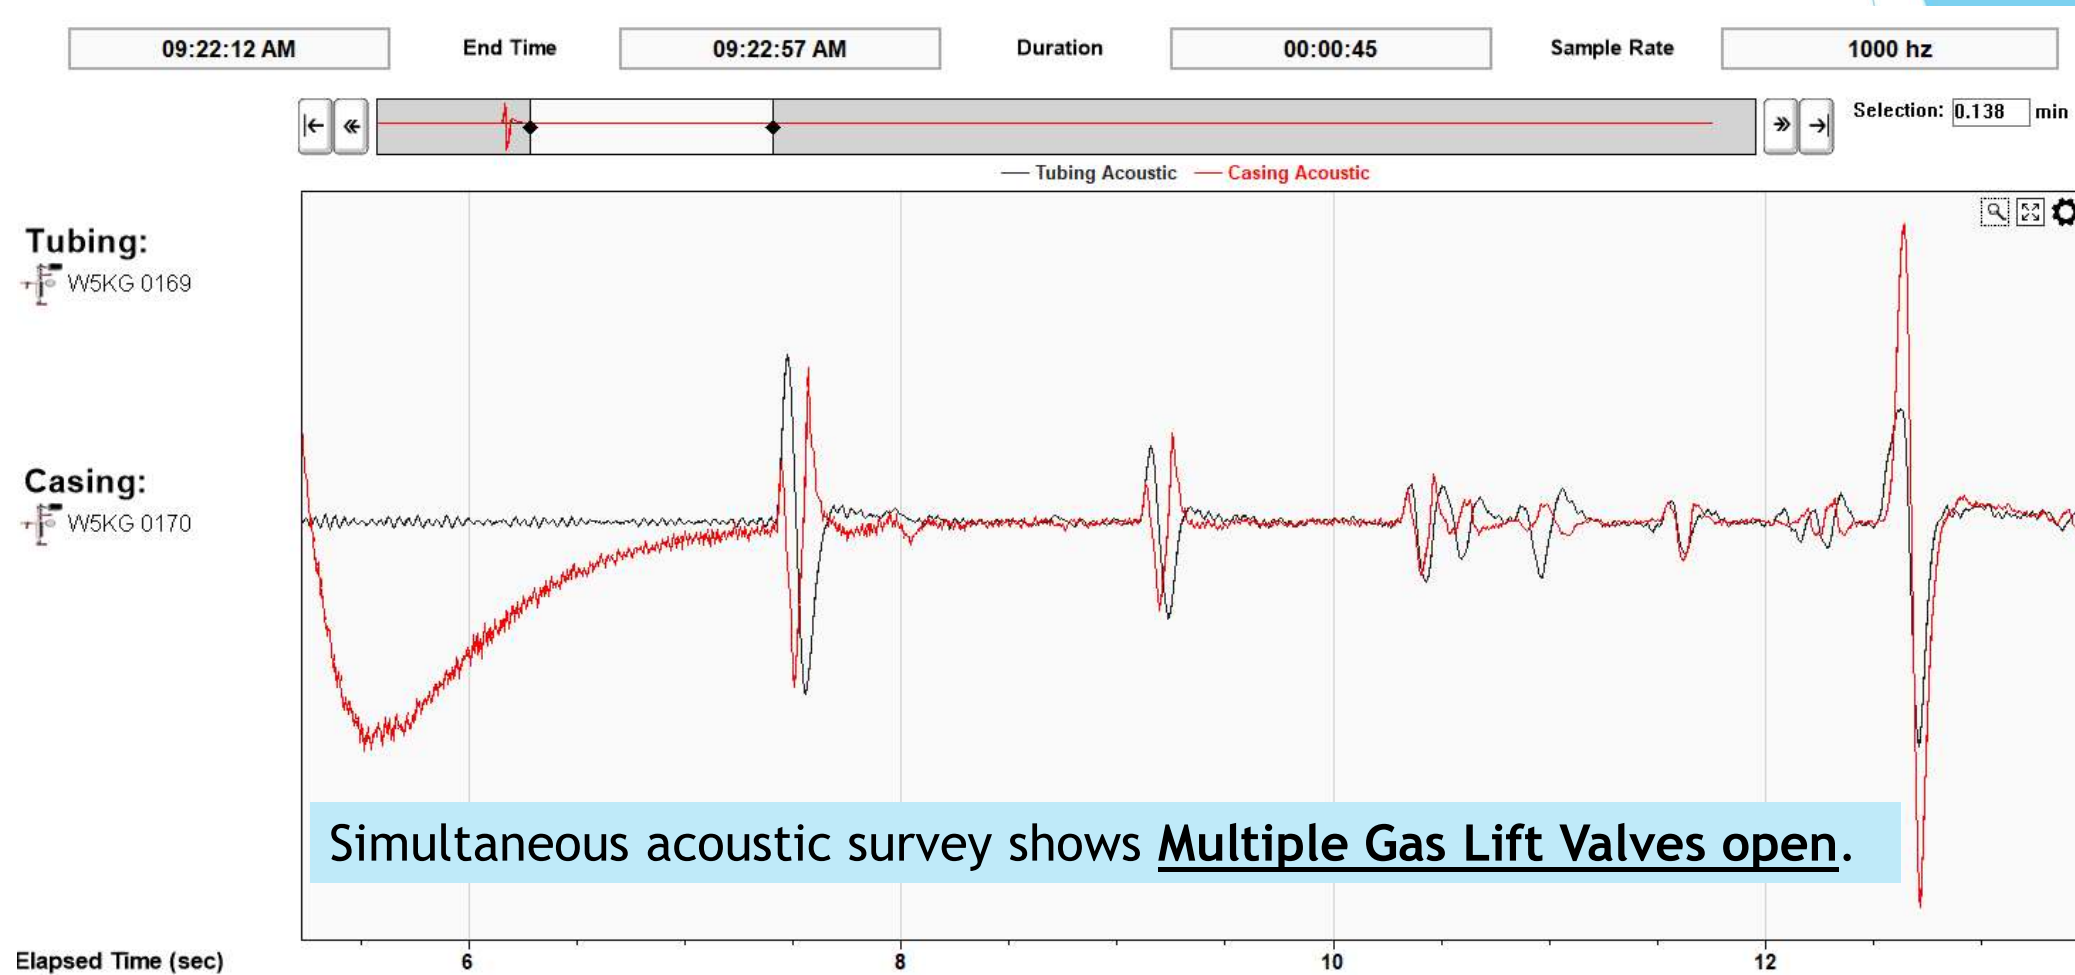

# Well Example 5

Wireline Temperature Survey shows  
>30° difference between design and actual  
well temperature.

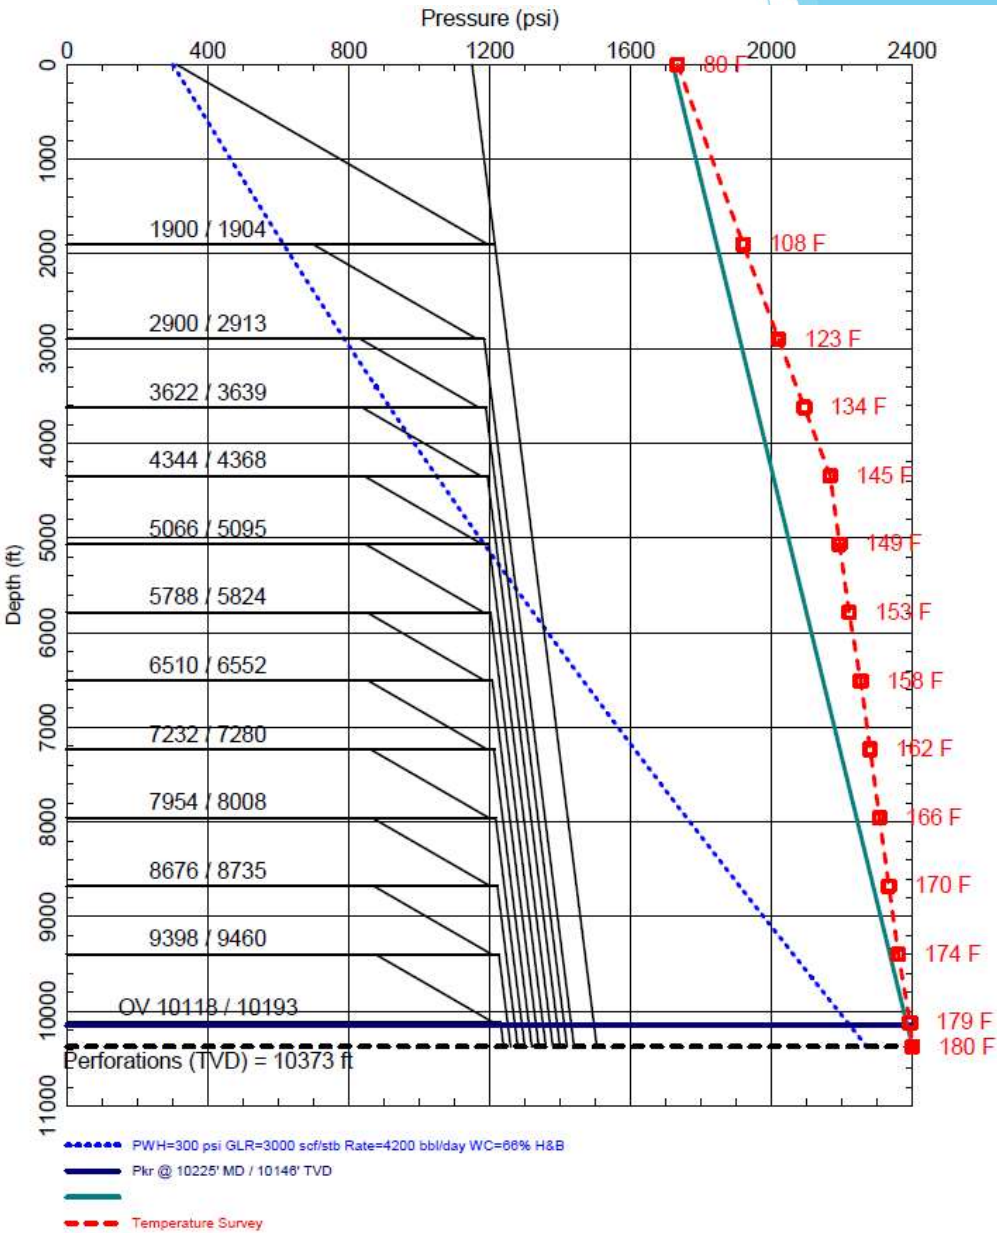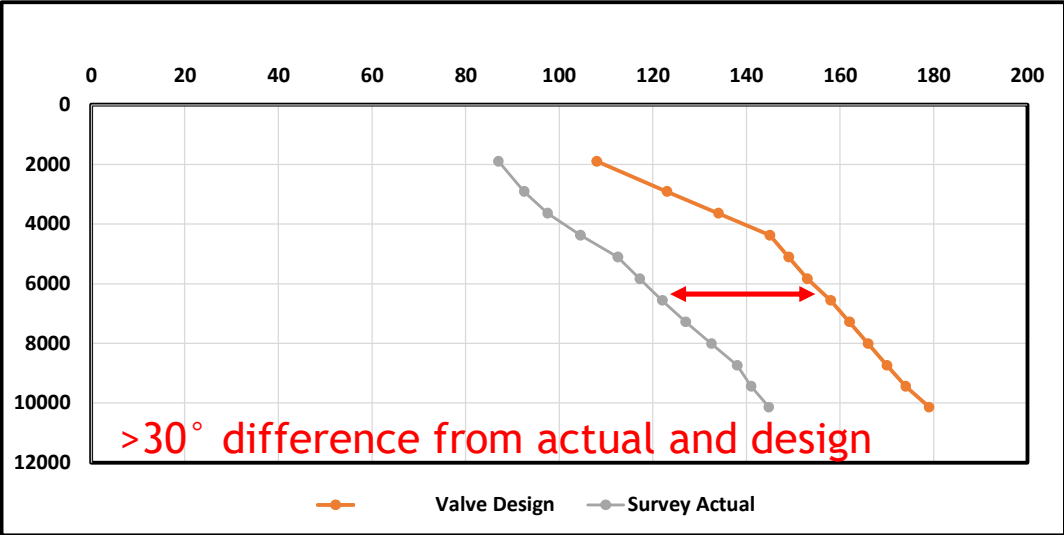



# Conclusions



- ▶ Confidence & experience will grow by continuously using this technique, which in many cases will eliminate the need of running Wireline Surveys for troubleshooting purposes.
- ▶ By using a non-invasive troubleshooting method, it eliminates the risk of running sensors/tools in the well (fish).
- ▶ Being able to “see” pressure wave passing from tubing to casing annulus (or vice versa) is used to confirm communication points in the well.
- ▶ Simultaneous acoustic surveys technique is used to find communication points such as faulty check valves, leaky gas-lift valves, and holes in tubing.
- ▶ Other beneficial information is obtained as which gas lift valves are open (or closed) at a given surface casing pressure.
- ▶ Kick shape from Gas Lift valves can give an idea of a malfunctioning valve, but using this troubleshooting method (simultaneous acoustic survey analysis) can confirm the existence of such communication.
- ▶ Using Gas Lift Mandrels reflections as downhole marker helps to accurately determine depth of anomalies and Fluid Level.
- ▶ This technique using wireless fluid level equipment aids in troubleshooting well problems.
- ▶ Commonly used to troubleshoot Gas Lift, Plunger Lift and Gas wells, but it can be used in any type of well with tubing and tubing-casing annulus.

# Acknowledgement

A special thank you to:

**Conoco Phillips**

Julio Haulcy

Bill Hearn

**Echometer Company**

Lynn Rowlan

CarrieAnne Taylor

Artificial Lift  
R&D Council



Thanks...



# Copyright

Rights to this presentation are owned by the company(ies) and/or author(s) listed on the title page. By submitting this presentation to the Gas-Lift Workshop, they grant to the Workshop, the Artificial Lift Research and Development Council (ALRDC) rights to:

- ▶ Display the presentation at the Workshop.
- ▶ Place it on the [www.alrdc.com](http://www.alrdc.com) web site, with access to the site to be as directed by the Workshop Steering Committee.
- ▶ Links to presentations on ALRDC's social media accounts.
- ▶ Place it on a USB/CD for distribution and/or sale as directed by the Workshop Steering Committee.

Other uses of this presentation are prohibited without the expressed written permission of the company(ies) and/or author(s) who own it and the Workshop Steering Committee.





# Disclaimer

The following disclaimer shall be included as the last page of a Technical Presentation or Continuing Education Course. A similar disclaimer is included on the front page of the Gas-Lift Workshop Web Site.

The Artificial Lift Research and Development Council and its officers and trustees, and the Gas-Lift Workshop Steering Committee members, and their supporting organizations and companies (here-in-after referred to as the Sponsoring Organizations), and the author(s) of this Technical Presentation or Continuing Education Training Course and their company(ies), provide this presentation and/or training material at the Gas-Lift Workshop "as is" without any warranty of any kind, express or implied, as to the accuracy of the information or the products or services referred to by any presenter (in so far as such warranties may be excluded under any relevant law) and these members and their companies will not be liable for unlawful actions and any losses or damage that may result from use of any presentation as a consequence of any inaccuracies in, or any omission from, the information which therein may be contained.

The views, opinions, and conclusions expressed in these presentations and/or training materials are those of the author and not necessarily those of the Sponsoring Organizations. The author is solely responsible for the content of the materials.

The Sponsoring Organizations cannot and do not warrant the accuracy of these documents beyond the source documents, although we do make every attempt to work from authoritative sources. The Sponsoring Organizations provide these presentations and/or training materials as a service. The Sponsoring Organizations make no representations or warranties, express or implied, with respect to the presentations and/or training materials, or any part thereof, including any warranties of title, non-infringement of copyright or patent rights of others, merchantability, or fitness or suitability for any purpose.